


MIC 400W LED FLOOD LIGHT

LIGHT THE WORLD




ITEM No.: MFL-R400


Electrical Specifications

- **Led Power** 400w
- **IP Grade** IP66
- **Input Voltage** AC85-300V&AC180-528V
- **Operating Temperature** -35°C to +55°C
- **Driver Brand** Meanwell & Sosen 
- **Power Factor (PF)** >0.95
- **Driver Efficiency** >92%
- **Certification** CE,ROHS,TUV,FCC,ETL/DLC


Photometric & Packing Specifications

- **Led Lamp** SMD 3030 
- **Led Quantity** 736pcs LEDs
- **Lumen Output** >52000LM
- **Light Efficient** 130lm/w
- **Beam angle** 15/30/60°
- **Life span** >50000 hours
- **Guarantee** 6(Meanwell) & 5(Sosen) years
- **CCT** 2700k~6500k
- **CRI** >80
- **NW/GW** 15kg/17kg
- **Product size** L572*W480*H324mm
- **Carton size** 660*610*240mm, 1pcs/CTN

Product size

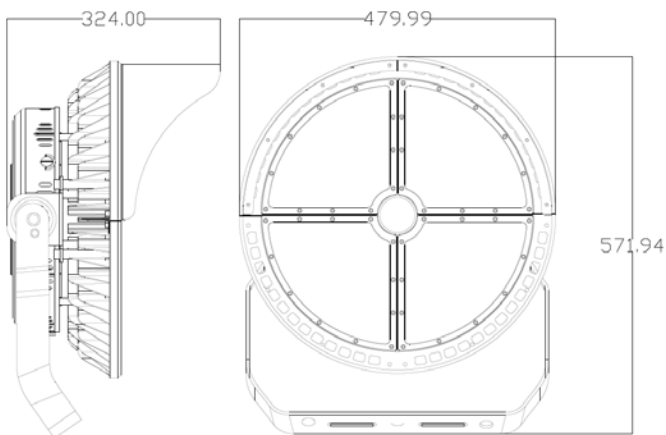

Spectrum

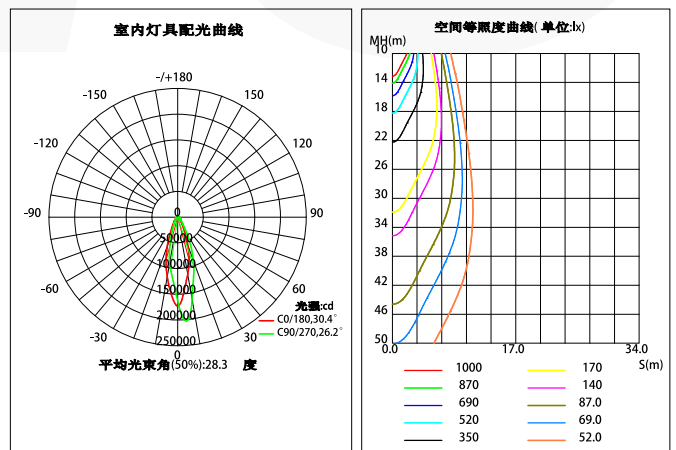

MIC R series led flood light use high quality SMD3030 LED chip and Taiwan Meanwell & Sosne UL Driver. Adopts integrated die-casting aluminum housing design, with excellent dissipation performance. This product is widely used for golf course, stadium, square, building docks, workshop etc.

[illegible]

1. Please hire qualified person or professional installation company to install the light.
2. Please check the local voltage range is correspond with the working voltage of the light before installation.
3. Examine product carefully after open the carton. If it's damaged, please contact us.
4. Make sure the power supply has been cut off before maintenance or installation the lamp. After confirm the power cord is properly installed, the power can be turn on.
5. Make sure there is a good ventilation environment around the lamp. Keep the light out of fire, electrical shock or vibration.