

MIC 240W LED FLOOD LIGHT

LIGHT THE WORLD



ITEM No.: MFL-G240

Electrical Specifications




- **Led Power** 240w
- **IP Grade** IP66
- **Input Voltage** AC85-305V
- **Operating Temperature** -40°C to +55°C
- **Driver Brand** Meanwell & Sosen
- **Power Factor (PF)** >0.95
- **Driver Efficiency** >92%
- **Certification** CE,ROHS,TUV,FCC,ETL/DLC



Photometric & Packing Specifications



- **Led Lamp** SMD 5050 **PHILIPS**
- **Led Quantity** 92pcs LEDs
- **Lumen Output** >38400LM
- **Light Efficient** 160lm/w
- **Life span** >50000 hours
- **Beam angle** 20/40/60/90°(Symmetrical)
100°140°(Asymmetrical)
- **Guarantee** 6(Meanwell) & 5(Sosen) years
- **CCT** 2700k~6500k
- **CRI** >80
- **NW/GW** 5.6kg/6.2kg
- **Product size** W362*L343*H132mm
- **Carton size** 410*380*180mm, 1pcs/CTN

Product size

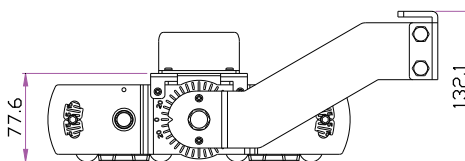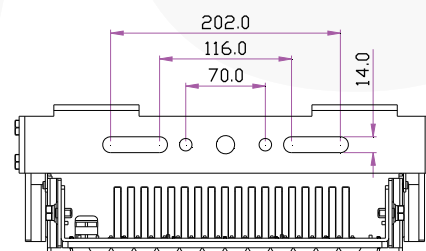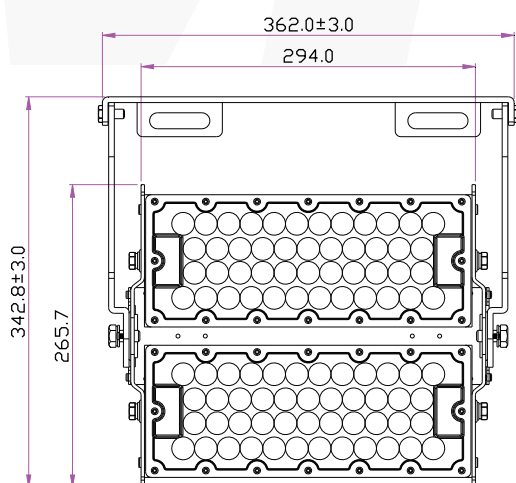



Lens optional

Symmetrical PC lens: 20°/40°/60°/90°
Asymmetrical PC lens: 100°×140°

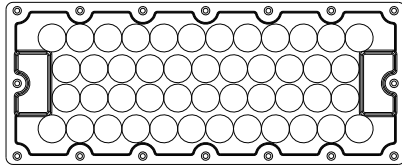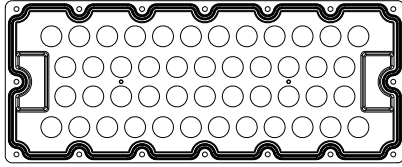


Beam angle


Module's beam angle can be adjustable

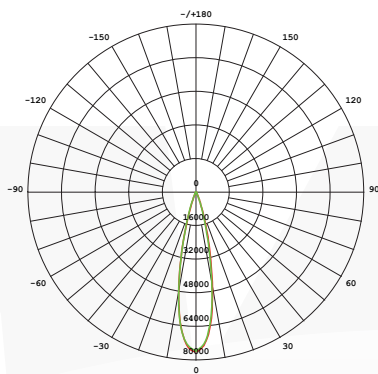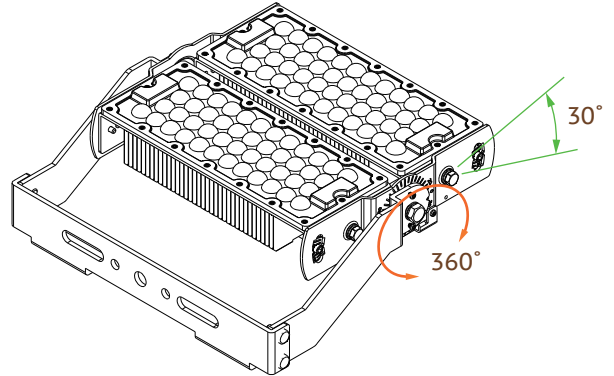


20°

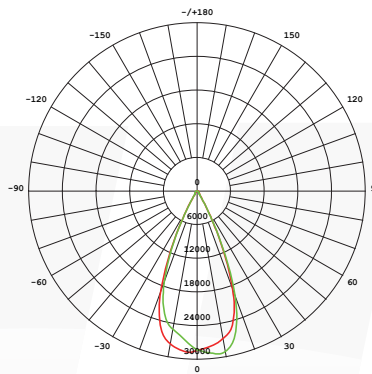


40°

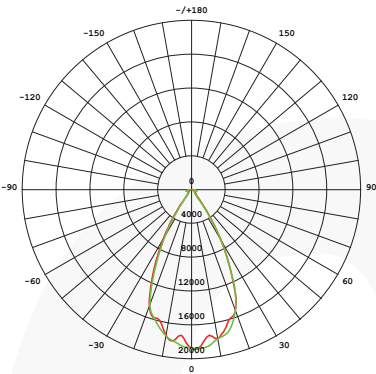


60°

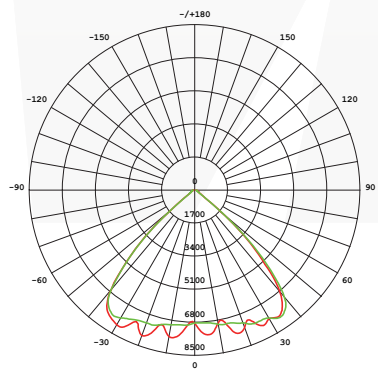

90°

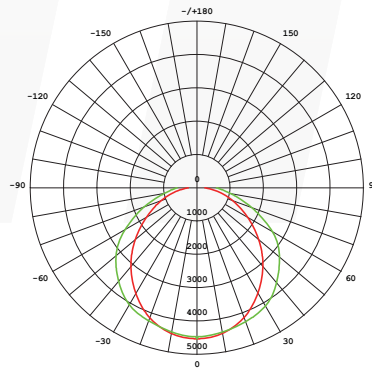

120°

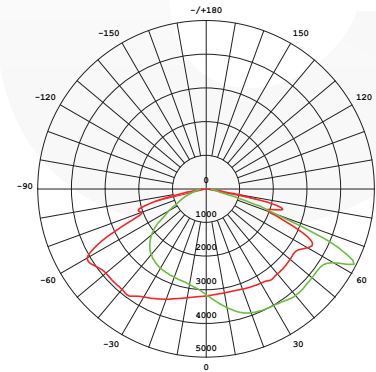

100°×140°

Warning

1. Please hire qualified person or professional installation company to install the light.
2. Please check the local voltage range is correspond with the working voltage of the light before installation.
3. Examine product carefully after open the carton. If it's damaged, please contact us.
4. Make sure the power supply has been cut off before maintenance or installation the lamp. After confirm the power cord is properly installed, the power can be turn on.
5. Make sure there is a good ventilation environment around the lamp. Keep the light out of fire, electrical shock or vibration.