



ITEM No.: MFL-D1000


Electrical Specifications

• Led Power	1000w
• IP Grade	IP66
• IK	IK08
• Input Voltage	AC85-305V (50/60Hz)
• Operating Temperature	-40°C to +50°C
• Driver Brand	Meanwell driver 
• Power Factor (PF)	>0.95
• Certification	CE,ROHS,TUV,FCC,ETL,CB,IECEE

Photometric & Packing Specifications


• Led Lamp	SMD 3030 	• Guarantee	5 years 
• Led Quantity	2400pcs LEDs	• CCT	2700k~6500k
• Lumen Output	>150000LM	• CRI	>80
• Light Efficient	150lm/w	• Advange	with anti-glare reflector
• Life span	>50000 hours	• NW/GW	32kg/34kg
• Beam angle	7/15/30/40/60/90°(Symmetrical) T2M/T3M/T4M(Asymmetrical)	• Product size	W869*L678*H282mm
		• Carton size	960*740*220mm, 1pcs/CTN

Product size(Unit:mm)

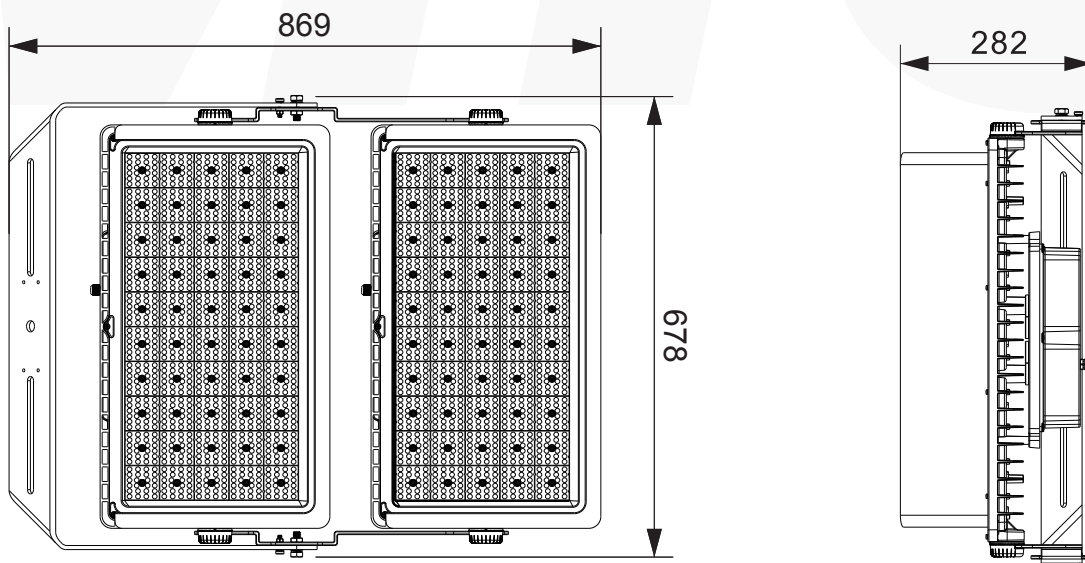


Lens optional


Symmetrical PC lens: 7°/15°/30°/40°/60°/90°, Asymmetrical PC lens: T2M/T3M/T4M.

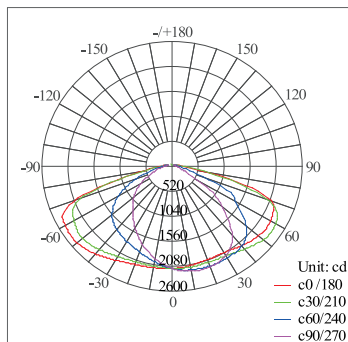


T2M

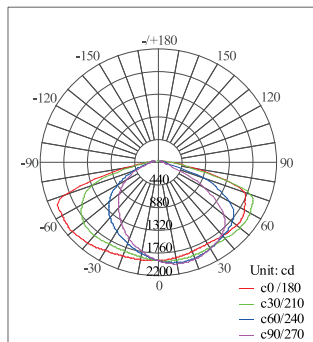


T3M




T4M

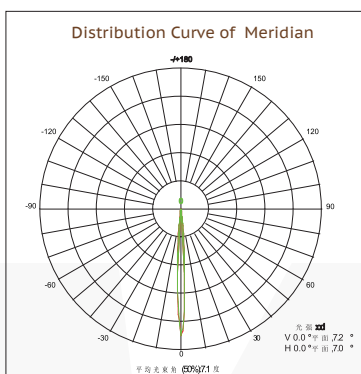


7°

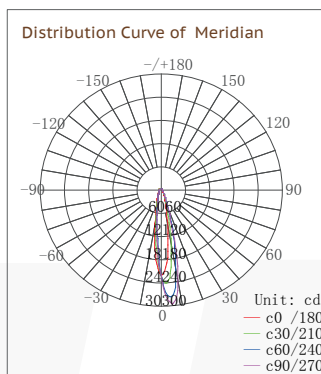


15°

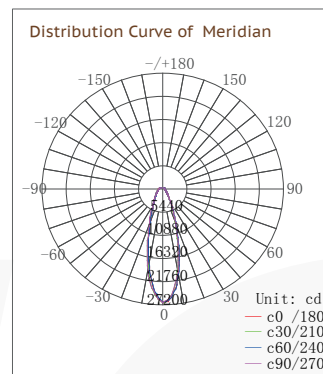


30°

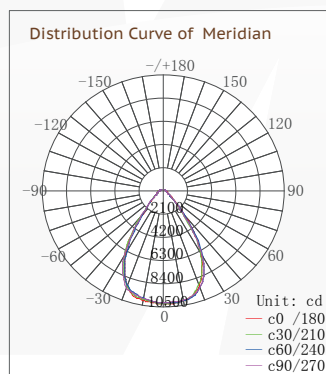

40°

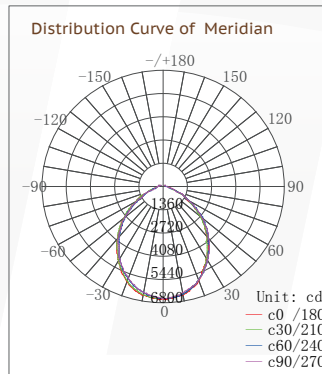

60°

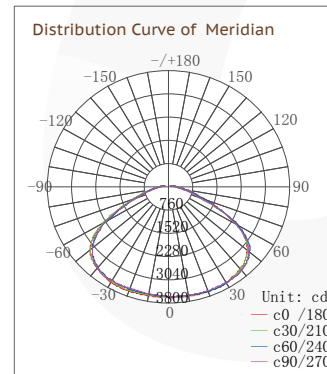

90°

Installation diagram

