

MIC 300W LED FLOOD LIGHT

LIGHT THE WORLD



ITEM No.: MFL-D300



Electrical Specifications

- **Led Power** 300w
- **IP Grade** IP66
- **IK** IK08
- **Input Voltage** AC85-305V (50/60Hz)
- **Operating Temperature** -40°C to +50°C
- **Driver Brand** Meanwell driver 
- **Power Factor (PF)** >0.95
- **Certification** CE,ROHS,TUV,FCC,ETL,CB,IECEE

Photometric & Packing Specifications


- **Led Lamp** SMD 3030 
- **Led Quantity** 768pcs LEDs
- **Lumen Output** >45000LM
- **Light Efficient** 150lm/w
- **Life span** >50000 hours
- **Beam angle** 7/15/30/40/60/90°(Symmetrical)
T2M/T3M/T4M(Asymmetrical)
- **Guarantee** 5 years 
- **CCT** 2700k~6500k
- **CRI** >80
- **Advange** with anti-glare reflector
- **NW/GW** 10.5kg/12kg
- **Product size** W531 *L377*H229mm
- **Carton size** 558*432*172mm, 1pcs/CTN

Product size(Unit:mm)

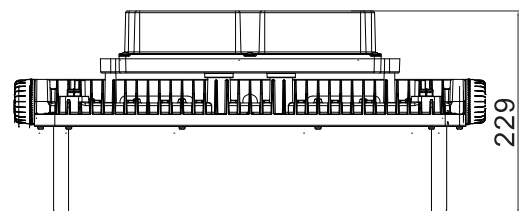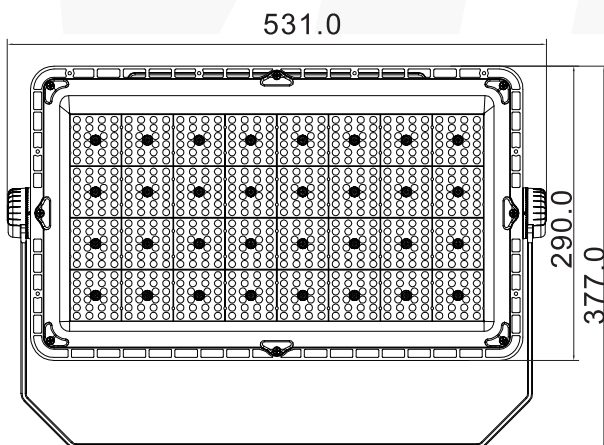


Lens optional


Symmetrical PC lens: 7°/15°/30°/40°/60°/90°, Asymmetrical PC lens: T2M/T3M/T4M.




T2M




T3M




T4M

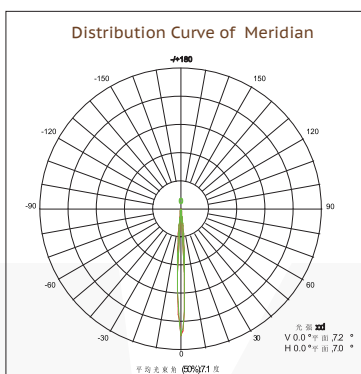


7°

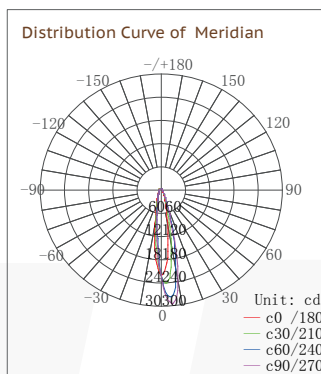


15°

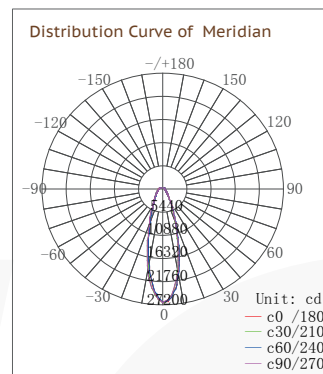


30°

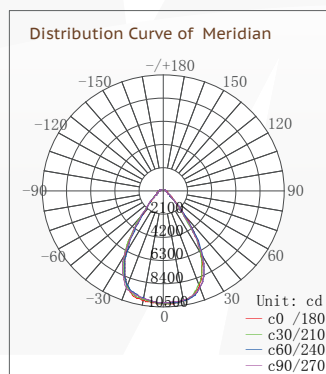

40°

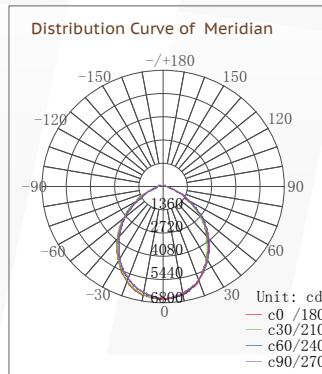

60°

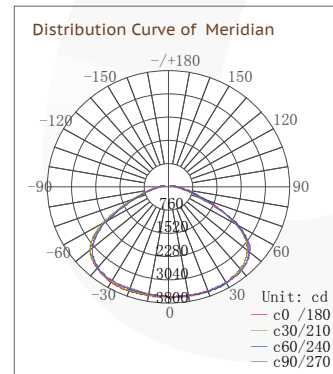

90°

Installation diagram

