

MIC 600W LED FLOOD LIGHT

LIGHT THE WORLD



ITEM No.: MFL-D600

Electrical Specifications



• Led Power	600w
• IP Grade	IP66
• IK	IK08
• Input Voltage	AC85-305V (50/60Hz)
• Operating Temperature	-40°C to +50°C
• Driver Brand	Meanwell driver 
• Power Factor (PF)	>0.95
• Certification	CE,ROHS,TUV,FCC,ETL,CB,IECEE

Photometric & Packing Specifications

• Led Lamp	SMD 3030 
• Led Quantity	1200pcs LEDs
• Lumen Output	>90 000LM
• Light Efficient	150lm/w
• Life span	>50000 hours
• Beam angle	7/15/30/40/60/90°(Symmetrical) T2M/T3M/T4M(Asymmetrical)


• Guarantee	5 years 
• CCT	2700k~6500k
• CRI	>80
• Advange	with anti-glare reflector
• NW/GW	15kg/16kg
• Product size	W637*L462*H264mm
• Carton size	672*534*188mm, 1pcs/CTN

Product size(Unit:mm)

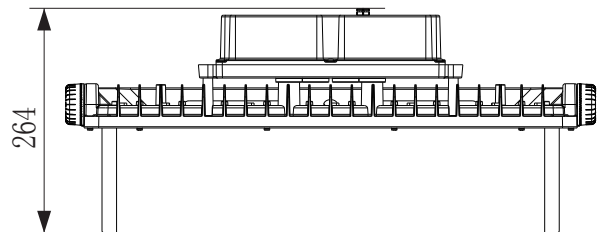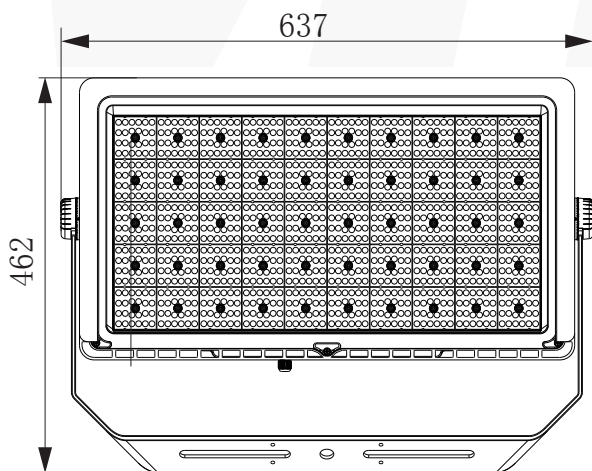


Lens optional


Symmetrical PC lens: 7°/15°/30°/40°/60°/90°, Asymmetrical PC lens: T2M/T3M/T4M.




T2M




T3M




T4M

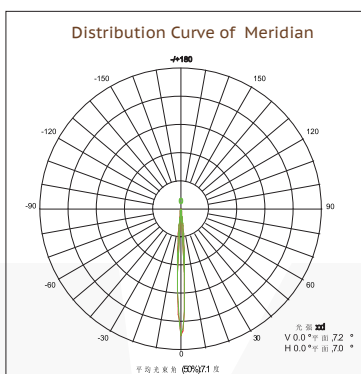


7°

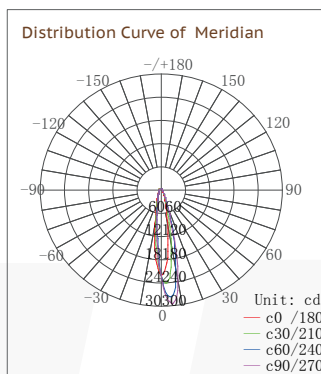


15°

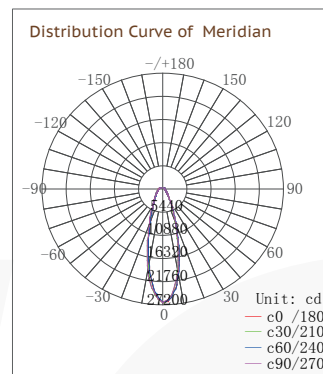


30°

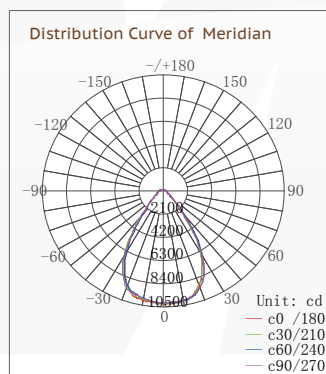

40°

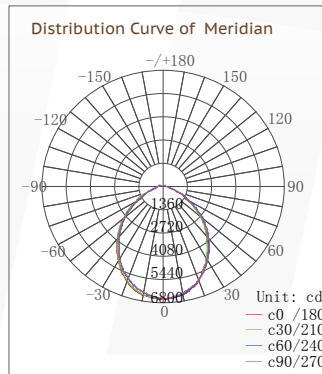

60°

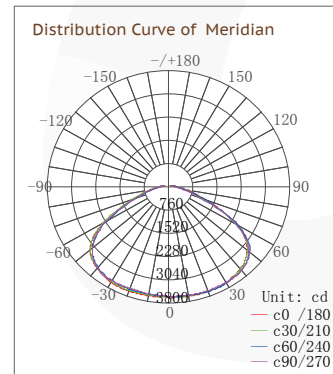

90°

Installation diagram

