


MIC 300W LED FLOOD LIGHT

LIGHT THE WORLD



ITEM No.: MFL-R300-1



Electrical Specifications

• Led Power	300w
• IP Grade	IP66
• IK	IK08
• Input Voltage	AC85-300V&AC180-528V
• Operating Temperature	-35°C to +50°C
• Driver Brand	Meanwell driver 
• Power Factor (PF)	>0.95
• Driver Efficiency	>92%
• Certification	CE,ROHS,TUV,FCC,ETL,IECEE,CB

Photometric & Packing Specifications

• Led Lamp	SMD 5050 	• Guarantee	5 years 
• Led Quantity	168pcs LEDs	• CCT	2700k~6500k
• Lumen Output	>45000LM	• CRI	>80
• Light Efficient	150lm/w	• Reflector	With Anti-glare roof
• Beam angle	30/60/90°	• NW/GW	12kg/13.5kg
• Life span	>50000 hours	• Product size	L483*W445.6*H321mm
		• Carton size	520*520*260mm, 1pcs/CTN

Product size

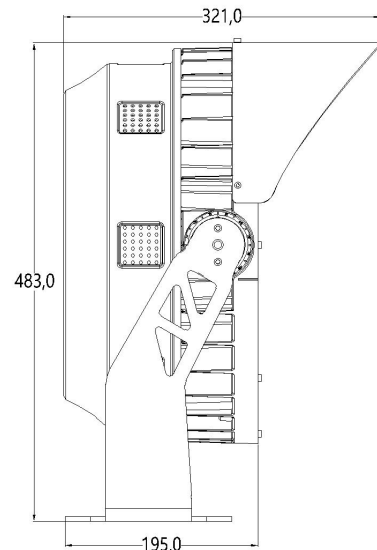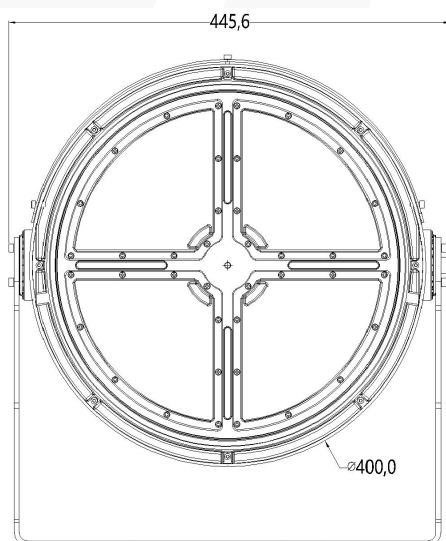


Production Introduction

MIC R-1 series led flood light use high quality SMD5050 LED chip and Taiwan Meanwell UL Driver. Adopts integrated die-casting aluminum housing design, with excellent dissipation performance. This product is widely used for golf course, stadium, square, building docks, workshop etc.



Bracket 180° adjustable

Mounting Bracket is 180° adjustable, easy for installation.

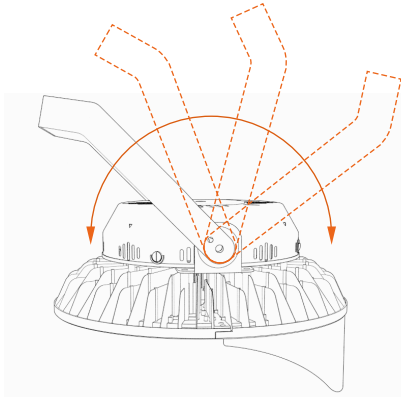


Lens optional


Beam angle: 30°/60°/90°

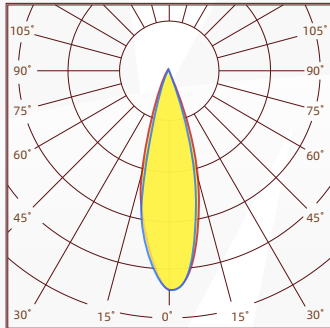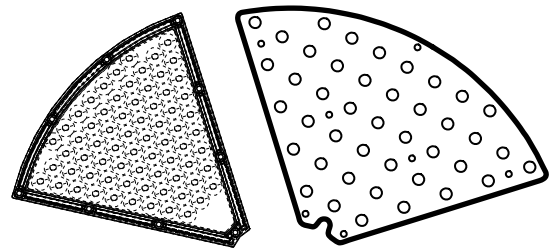

30°



60°



90°

Warning

1. Please hire qualified person or professional installation company to install the light.
2. Please check the local voltage range is correspond with the working voltage of the light before installation.
3. Examine product carefully after open the carton. If it's damaged, please contact us.
4. Make sure the power supply has been cut off before maintenance or installation the lamp. After confirm the power cord is properly installed, the power can be turn on.
5. Make sure there is a good ventilation environment around the lamp. Keep the light out of fire, electrical shock or vibration.