


# MIC 200W LED STREET LIGHT

LIGHT THE WORLD



ITEM No.: MSL-S200-1


## Electrical Specifications

- **Led Power** 200w
- **IP Grade** IP66
- **IK** IK09
- **Input Voltage** 85-305Vac
- **Operating Temperature** -40°C to +50°C
- **Driver Brand** Meanwell or Moso 
- **Power Factor (PF)** >0.95
- **Sensor** Photocell (optional)
- **Certification** CE,ROHS,TUV,ETL


## Photometric & Packing Specifications

- |                           |                   |                |                        |                             |
|---------------------------|-------------------|----------------|------------------------|-----------------------------|
| • <b>Led Lamp</b>         | SMD 3030          | <b>PHILIPS</b> | • <b>Guarantee</b>     | 5 years                     |
| • <b>Lumen Output</b>     | >26000LM          |                | • <b>CCT</b>           | 2700k~6500k                 |
| • <b>Light Efficiency</b> | 130lm/w           |                | • <b>Fitment Baser</b> | Slip fitter                 |
| • <b>Led Quantity</b>     | 256pcs LEDs       |                | • <b>Material</b>      | Aluminum+Glass+Optical Lens |
| • <b>Beam Angle</b>       | Type (2, 3, 4, 5) |                | • <b>NW/GW</b>         | 5.2kg/6.2kg                 |
| • <b>Life span</b>        | >50000 hours      |                | • <b>Product size</b>  | 657*298*84mm                |
| • <b>CRI</b>              | >80               |                | • <b>Carton size</b>   | 695*335*125mm, 1pcs/CTN     |


## Product size(Unit:mm)

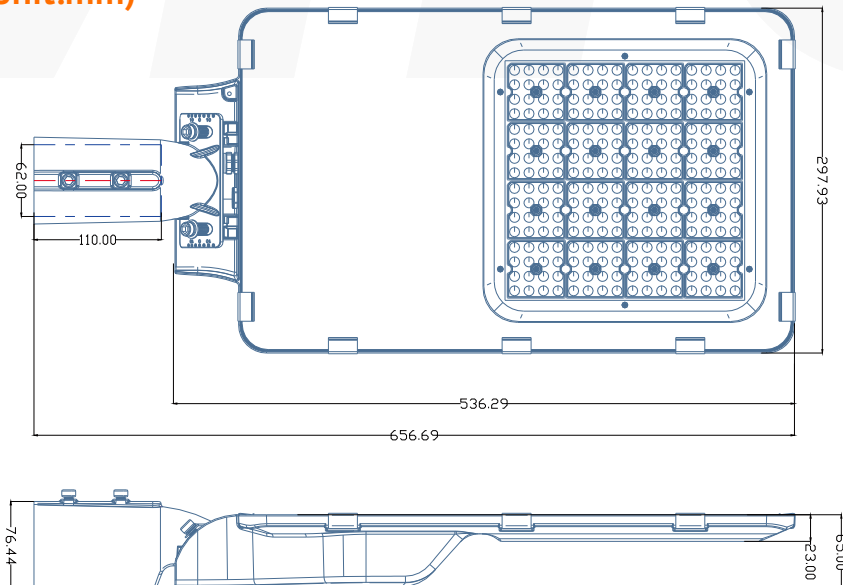

## Gradienter

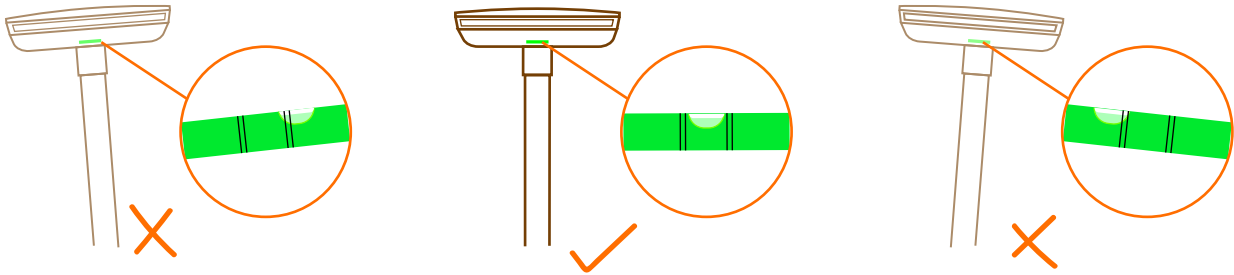


## Exploded view

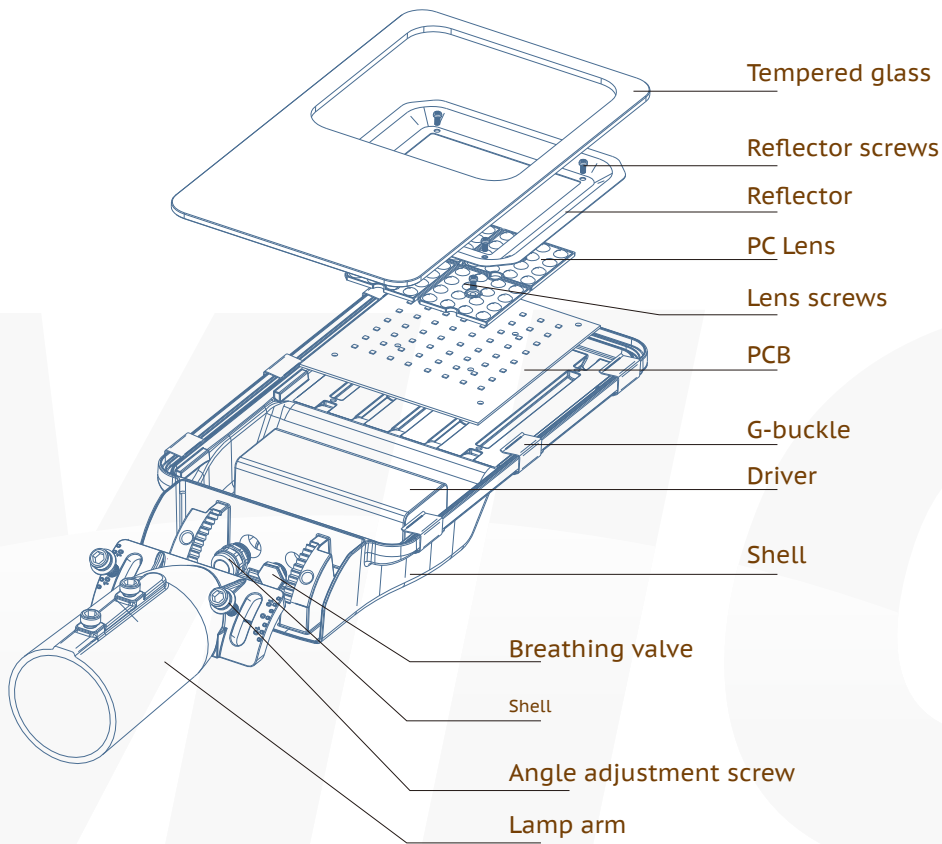

## Application




INTERCHANGE




ROADS & MOTORWAYS



URBAN & RESIDENTIAL STREETS



CAR PARKS



BIKE & PEDESTRIAN PATHS



HIGHMAST LIGHTING



SECURITY LIGHTING



INDUSTRIAL HARBOUR



LOADING BAY



SQUARES & PEDESTRIAN AREAS