

LIGHT THE WORLD-



Electrical Specifications

Led Power 80wIP Grade IP66IK IK09

• Input Voltage 85-305Vac

• Operating Temperature -40°C to +50°C

Driver Brand
 Meanwell or Moso
 MEANWELL
 MOSO

• Power Factor (PF) >0.95

Sensor Photocell (optional)

• Certification CE,ROHS,TUV,ETL

Photometric & Packing Specifications

• Led Lamp SMD 3030 PHILIPS

Lumen Output >10400LMLight Efficiency 130lm/w

• Led Quantity 96pcs LEDs

• **Beam Angle** Type (2, 3, 4, 5)

• Life span >50000 hours

• CRI >80

• **Guarantee** 5 years

• CCT 2700k~6500k

• Fitment Baser Slip fitter


• Material Aluminum+Glass+Optical Lens

• **NW/GW** 3kg/3.37kg

• **Product size** 545*200*84mm

• Carton size 585*235*125mm, 1pcs/CTN

Product size(Unit:mm)

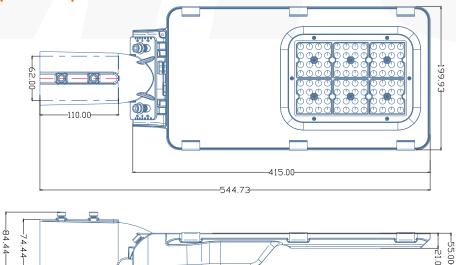

































Gradienter







Exploded view

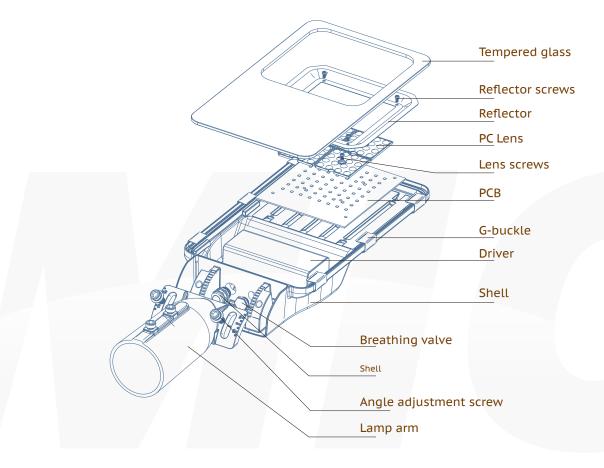

Application



INTERCHANGE



HIGHMAST LIGHTING



ROADS & MOTORWAYS



SECURITY LIGHTING



URBAN & RESIDENTIAL STREETS



INDUSTRIAL HARBOUR



CAR PARKS



LOADING BAY



BIKE &
PEDESTRIAN
PATHS



SQUARES & PEDESTRIAN AREAS