



Test Report issued under the responsibility of:



**TEST REPORT**  
**IEC 60598-2-1**  
**Luminaires**  
**Part 2: Particular requirements**  
**Section 1: Fixed general purpose luminaires**

**Report Number.....** : CN231UCS 001  
**Date of issue.....** : 2023-11-16  
**Total number of pages.....** : 40 pages

**Name of Testing Laboratory preparing the Report .....** : TÜV Rheinland (Shenzhen) Co., Ltd.

**Applicant's name.....** : MIC Optoelectronic Co.,Ltd  
**Address.....** : 3rd floor, D building ,12# Jinyuan first road, Heao, Henggang, Longgang district, Shenzhen, P.R. China

**Test specification:**  
**Standard.....** : IEC 60598-2-1:2020 used in conjunction with IEC 60598-1:2020  
**Test procedure.....** : CB Scheme  
**Non-standard test method .....** : N/A

**TRF template used .....** : IECEE OD-2020-F1:2021, Ed.1.4  
**Test Report Form No. ....** : IEC60598\_2\_11  
**Test Report Form(s) Originator....** : Intertek Semko AB  
**Master TRF .....** : Dated 2022-08-26

**Copyright © 2022 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.**



This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

**This report is not valid as a CB Test Report unless signed by an approved IECEE Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.**

**General disclaimer:**

The test results presented in this report relate only to the object tested.  
This report shall not be reproduced, except in full, without the written approval of the Issuing NCB. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

<b>Test item description .....</b>	LED GARDEN LIGHT	
<b>Trade Mark(s) .....</b>	N/A	
<b>Manufacturer .....</b>	Same as applicant	
<b>Model/Type reference.....</b>	MYL-A50, MYL-A75, MYL-A100, MYL-A120, MYL-A150	
<b>Ratings .....</b>	AC 100-240V, 50/60Hz, t <sub>a</sub> 45°C, IP66, Class I, details information see "General product information"	
<b>Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):</b>		
<input checked="" type="checkbox"/>	<b>CB Testing Laboratory:</b>	TÜV Rheinland (Shenzhen) Co., Ltd.
	<b>Testing location/ address..... :</b>	1601-1604, 17-18F, Tower A Building 2, Shenzhen International Innovation Valley, Dashi 1st Road, Xili Street, Xili Community, Nanshan District, Shenzhen 518052, China
	<b>Tested by (name, function, signature) .... :</b>	Duffe Zhong Project handler 
	<b>Approved by (name, function, signature):</b>	Young Yang Reviewer 
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 1:</b>	N/A
	<b>Testing location/ address..... :</b>	N/A
	<b>Tested by (name, function, signature) .... :</b>	N/A
	<b>Approved by (name, function, signature):</b>	N/A
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 2:</b>	N/A
	<b>Testing location/ address..... :</b>	N/A
	<b>Tested by (name + signature)..... :</b>	N/A
	<b>Witnessed by (name, function, signature):</b>	N/A
	<b>Approved by (name, function, signature):</b>	N/A
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 3:</b>	N/A
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 4:</b>	N/A
	<b>Testing location/ address..... :</b>	N/A
	<b>Tested by (name, function, signature) .... :</b>	N/A
	<b>Witnessed by (name, function, signature):</b>	N/A
	<b>Approved by (name, function, signature):</b>	N/A
	<b>Supervised by (name, function, signature):</b>	N/A

**List of Attachments (including a total number of pages in each attachment):**

Attachment 1: LED modules for general lighting - Safety specifications tests according to IEC 62031:2018. (22 pages)  
 Attachment 2: The assessment of blue light hazard to light sources and luminaires were according to standard IEC TR 62778:2014. (9 pages)  
 Attachment 3: EMF Assessment according to IEC 62493:2015 and EN 62493:2015. (9 pages)  
 Attachment 4: Test for LUM earthing terminal of LED driver according to IEC 61347-1:2015+A1. (1 page)  
 Attachment 5: Photo document. (7 pages)

**Summary of testing:****Tests performed (name of test and test clause):**

<u>Clause(s)</u>	<u>Test(s)</u>
IEC 60598-2-1:2020 used in conjunction with IEC 60598-1:2020	
1.6 (3.4)	Rubbing test
1.7 (4.12.1)	Screw torque test
1.7 (4.13.1)	Impact test
1.7 (4.13.3)	Straight unjointed test finger
1.7 (4.14.1)	Test for mechanical suspensions
1.11 (5.2.10.3)	Cord anchorage test
1.12 (8.2.5)	Protection against electric shock tests
1.12 (8.2.6)	Covers reliably secured
1.12 (8.2.7)	Discharge test
1.14 (9.2)	Tests for ingress of dust, solid objects and moisture
1.14 (9.3)	Humidity test
1.15 (10.2.1)	Insulation resistance test
1.15 (10.2.2)	Electric strength test
1.15 (10.3)	Touch current test and protective conductor current test
1.8 (11)	Creepage distances and clearances
1.13 (12.3)	Endurance test
1.13 (12.4)	Thermal test
1.16 (13.2.1)	Ball pressure test
1.16 (13.3.1)	Needle flame test
1.16 (13.3.2)	Glow-wire test

Full tests were performed on model MYL-A150.  
 Partial tests were performed on other models.

**Testing location:**

TÜV Rheinland (Shenzhen) Co., Ltd.  
 1601-1604, 17-18F, Tower A Building 2, Shenzhen International Innovation Valley, Dashi 1st Road, Xili Street, Xili Community, Nanshan District, Shenzhen 518052, China

**Summary of compliance with National Differences (List of countries addressed):**

N/A

**Use of uncertainty of measurement for decisions on conformity (decision rule) :**

No decision rule is specified by the IEC standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule, previously known as "accuracy method").

Other:... (to be specified, for example when required by the standard or client, or if national accreditation requirements apply)

**Information on uncertainty of measurement:**

The uncertainties of measurement are calculated by the laboratory based on application of criteria given by OD-5014 for test equipment and application of test methods, decision sheets and operational procedures of IECEE.

IEC Guide 115 provides guidance on the application of measurement uncertainty principles and applying the decision rule when reporting test results within IECEE scheme, noting that the reporting of the measurement uncertainty for measurements is not necessary unless required by the test standard or customer.

Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.

**Copy of marking plate:**

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

**Label located on the packaging or attached on the lamp:**

**LED GARDEN LIGHT**  
**Model: MYL-A150**  
**Input: 100-240V  $\sim$ , 50/60Hz, 150W**  
**IP66**  $t_a$  45°C  
**MIC Optoelectronic Co.,Ltd**

**Note:**

1. Other models are same as above, except model name and rating.
2. The height of letters and numerals is not less than 2 mm.
3. The height of graphical symbols are not less than 5 mm.



4. : "caution, electric shock risk" symbol, height of this marks is 15mm. Attached on the Glass cover.

<b>Test item particulars</b> .....: Fixed general purpose luminaires	
<b>Classification of installation and use</b> .....: Class I and suitable for indoor and outdoor use	
<b>Supply Connection</b> .....: Supply cord	
<b>Possible test case verdicts:</b>	
- test case does not apply to the test object..... : N/A	
- test object does meet the requirement ..... : P (Pass)	
- test object does not meet the requirement..... : F (Fail)	
<b>Testing</b> ..... :	
<b>Date of receipt of test item</b> ..... : 2023-10-10	
<b>Date (s) of performance of tests</b> ..... : 2023-10-10 to 2023-11-06	
<b>General remarks:</b>	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.	
Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.	
<b>Manufacturer's Declaration per sub-clause 4.2.5 of IEC60598-2-11:</b>	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....:	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
<b>When differences exist; they shall be identified in the General product information section.</b>	
<b>Name and address of factory (ies)</b> .....: Same as applicant's name & address	

**General product information:**

Product: LED GARDEN LIGHT

Ratings: 100-240V $\sim$ , 50/60Hz, IP66, ta=45°C Class I, Luminaire suitable for direct mounting on normally flammable surfaces, suitable for indoor and outdoor use.

1. All models use same LED type 3030 (L130-xxxx003000x21), CCT 2200-5000K.
2. The SURFACE LED LIGHT connecting the supply mains via an external detachable LED driver, the supply connection method is Supply cord form the LED driver.
3. All models have the same construction and appearance except the power and LED driver.
4. The product is not designed for road, street lighting and other public outdoor lighting applications.

**Model list:**

Model name	Power (W)	Size (DxHmm)	LED driver model No.
MYL-A50	50	Ø452x551	XLG-100-H-A
MYL-A75	75		XLG-100-H-A
MYL-A100	100		XLG-100-H-A
MYL-A120	120		XLG-150-H-A
MYL-A150	150		XLG-150-H-A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>1.4 (0)</b>	<b>GENERAL TEST REQUIREMENTS</b>		P
1.4 (0.3)	More sections applicable..... :	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> Section/s:	—
1.4 (0.5)	Components	(see Annex 1)	—
<b>1.4 (0.7)</b>	<b>Information for luminaire design in light sources standards</b>		—
1.4 (0.7.2)	Light source safety standard .....	IEC 62031:2018 IEC TR 62778:2014	—
	Luminaire design in the light source safety standard		P
<b>1.5 (2)</b>	<b>CLASSIFICATION OF LUMINAIRES</b>		P
1.5 (2.2)	Type of protection .....	Class I	P
1.5 (2.3)	Degree of protection..... :	IP66	—
1.5 (2.4)	Luminaire suitable for direct mounting on normally flammable surfaces .....	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
1.5 (2.5)	Luminaire for normal use .....	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	Luminaire for rough service .....	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
<b>1.6 (3)</b>	<b>MARKING</b>		P
1.6 (3.2)	Mandatory markings		P
	Position of the marking		P
	Format of symbols/text		P
1.6 (3.3)	Additional information		P
	Language of instructions	English	P
1.6 (3.3.1)	Combination luminaires		N/A
1.6 (3.3.2)	Nominal frequency in Hz	50/60Hz	P
1.6 (3.3.3)	Operating temperature		N/A
1.6 (3.3.5)	Wiring diagram		N/A
1.6 (3.3.6)	Special conditions		N/A
1.6 (3.3.7)	Metal halide lamp luminaire – warning		N/A
1.6 (3.3.8)	Limitation for semi-luminaires		N/A
1.6 (3.3.9)	Power factor and supply current		N/A
1.6 (3.3.10)	Suitability for use indoors		P
1.6 (3.3.11)	Luminaires with remote control		N/A
1.6 (3.3.12)	Clip-mounted luminaire – warning		N/A
1.6 (3.3.13)	Specifications of protective shields		N/A
1.6 (3.3.14)	Symbol for nature of supply	~	P



IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.6 (3.3.15)	Rated current of socket outlet		N/A
1.6 (3.3.16)	Rough service luminaire		N/A
1.6 (3.3.17)	Mounting instruction for type Y, type Z and some type X attachments	Type Y	P
1.6 (3.3.18)	Non-ordinary luminaires with PVC cable		N/A
1.6 (3.3.19)	Protective conductor current in instruction if applicable		N/A
1.6 (3.3.20)	Provided with information if not intended to be mounted within arm's reach		N/A
1.6 (3.3.21)	Non replaceable and non-user replaceable light sources information provided	Non-user replaceable light sources	P
1.6 (3.3.22)	Controllable luminaires, classification of insulation provided		N/A
1.6 (3.3.23)	Luminaires without control gear provided with necessary information for selection of appropriate component		N/A
1.6 (3.3.24)	If not supplied with terminal block, information on the packaging		P
1.6 (3.3.25)	Luminaires employing light sources emitting UV on mains wiring, information provided		N/A
1.6 (3.3.26)	Wall mounted luminaire using external flexible cable or cord longer than 0.3 m, information provided		N/A
1.6 (3.4)	Test with water	15s	P
	Test with hexane	15s	P
	Legible after test		P
	Label attached		P

<b>1.7 (4)</b>	<b>CONSTRUCTION</b>		<b>P</b>
1.7 (4.2)	Components replaceable without difficulty		P
1.7 (4.3)	Wireways smooth and free from sharp edges		P
<b>1.7 (4.4)</b>	<b>Lamp holders</b>		<b>N/A</b>
1.7 (4.4.1)	Integral lamp holder		N/A
1.7 (4.4.2)	Wiring connection		N/A
1.7 (4.4.3)	Lamp holder for end-to-end mounting		N/A
1.7 (4.4.4)	Positioning		N/A
	- pressure test (N) .....		—
	After test the lamp holder comply with relevant standard sheets and show no damage		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	After test on single-capped lamp holder the lamp holder has not moved from its position and show no permanent deformation		N/A
	- bending test (N) .....		—
	After test the lamp holder has not moved from its position and show no permanent deformation		N/A
1.7 (4.4.5)	Peak pulse voltage		N/A
1.7 (4.4.6)	Centre contact		N/A
1.7 (4.4.7)	Parts in rough service luminaires resistant to tracking		N/A
1.7 (4.4.8)	Lamp connectors		N/A
1.7 (4.4.9)	Caps and bases correctly used		N/A
1.7 (4.4.10)	Light source for lamp holder or connection according IEC 60061 not connected another way		N/A
<b>1.7 (4.5)</b>	<b>Starter holders</b>		N/A
	Starter holder in luminaires other than class II		N/A
	Starter holder class II construction		N/A
<b>1.7 (4.6)</b>	<b>Terminal blocks</b>		N/A
	Tails		N/A
	Unsecured blocks		N/A
<b>1.7 (4.7)</b>	<b>Terminals and supply connections</b>		<b>N/A</b>
1.7 (4.7.1)	Contact to metal parts		N/A
1.7 (4.7.2)	Test 8 mm live conductor		N/A
	Test 8 mm earth conductor		N/A
1.7 (4.7.3)	Terminals for supply conductors		N/A
1.7 (4.7.3.1)	Welded method and material		N/A
	- stranded or solid conductor		N/A
	- spot welding		N/A
	- welding between wires		N/A
	- Type Z attachment		N/A
	- mechanical test according to 15.6.2		N/A
	- electrical test according to 15.6.3		N/A
	- heat test according to 15.6.3.2.3 and 15.6.3.2.4		N/A
1.7 (4.7.4)	Terminals other than supply connection		N/A
1.7 (4.7.5)	Heat-resistant wiring/sleeves		N/A
1.7 (4.7.6)	Multi-pole plug		N/A
	- test at 30 N		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>1.7 (4.8)</b>	<b>Switches</b>		N/A
	- adequate rating		N/A
	- adequate fixing		N/A
	- polarized supply		N/A
	- compliance with IEC 61058-1 for electronic switches		N/A
<b>1.7 (4.9)</b>	<b>Insulating lining and sleeves</b>		N/A
1.7 (4.9.1)	Retainment		N/A
	Method of fixing .....		N/A
1.7 (4.9.2)	Insulated linings and sleeves:		N/A
	Resistant to a temperature > 20 °C to the wire temperature or		N/A
	a) & c) Insulation resistance and electric strength		N/A
	b) Ageing test. Temperature (°C)..... :		N/A
<b>1.7 (4.10)</b>	<b>Double or reinforced insulation</b>		<b>N/A</b>
1.7 (4.10.1)	No contact, mounting surface – accessible metal parts – wiring of basic insulation		N/A
	Safe installation fixed luminaires		N/A
	Capacitors and switches		N/A
1.7 (4.10.2)	Assembly gaps:		N/A
	- not coincidental		N/A
	- no straight access with test probe		N/A
1.7 (4.10.3)	Retainment of insulation:		N/A
	- fixed		N/A
	- unable to be replaced; luminaire inoperative		N/A
	- sleeves retained in position		N/A
	- lining in lamp holder		N/A
1.7 (4.10.4)	Protective impedance device		N/A
	Basic and supplementary insulation bridged by resistor(s) or appropriate capacitor		N/A
	Double or reinforced insulation bridged by at least two separate resistors in series or appropriate capacitor(s)		N/A
	Capacitors comply with IEC 60384-14		N/A
	Resistors comply with test (a) in 14.2 of IEC 60065		N/A
<b>1.7 (4.11)</b>	<b>Electrical connections and current-carrying parts</b>		<b>P</b>

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7 (4.11.1)	Contact pressure		P
1.7 (4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
1.7 (4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
1.7 (4.11.4)	Material of current-carrying parts		P
1.7 (4.11.5)	No contact to wood or mounting surface		P
1.7 (4.11.6)	Electro-mechanical contact systems		N/A
<b>1.7 (4.12)</b>	<b>Screws and connections (mechanical) and glands</b>		<b>P</b>
1.7 (4.12.1)	Screws not made of soft metal		P
	Screws of insulating material		N/A
	Torque test: torque (Nm); part..... :	Fixed glass cover: 1,2Nm	P
	Torque test: torque (Nm); part..... :	Fixed LED lens: 0,5Nm	P
	Torque test: torque (Nm); part..... :	Fixed LED PCB: 0,5Nm	P
	Torque test: torque (Nm); part..... :	Fixed cord anchorage: 0,5Nm	P
	Torque test: torque (Nm); part..... :	Fixed enclosure of LED driver: 1,2Nm	P
	Torque test: torque (Nm); part..... :	Fixed enclosure of LED driver: 0,6Nm	P
1.7 (4.12.2)	Screws with diameter < 3 mm screwed into metal		P
1.7 (4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm) .....		N/A
	- lamp holder; torque (Nm) .....		N/A
	- push-button switches; torque 0,8 Nm .....		N/A
1.7 (4.12.5)	Screwed glands; force (Nm) .....	Metal gland: 6,25Nm	P
<b>1.7 (4.13)</b>	<b>Mechanical strength</b>		<b>P</b>
1.7 (4.13.1)	Impact tests:		P
	- fragile parts; energy (Nm)..... :		N/A
	- other parts; energy (Nm)..... :	0,35Nm for translucent cover, and plastic enclosure	P
	1) live parts		P
	2) linings		N/A
	3) protection		P

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	4) covers		P
1.7 (4.13.2)	Metal parts have adequate mechanical strength		P
1.7 (4.13.3)	Straight test finger	30N	P
1.7 (4.13.4)	Rough service luminaires		N/A
	- IP54 or higher		N/A
	a) fixed		N/A
	b) hand-held		N/A
	c) delivered with a stand		N/A
	d) for temporary installations and suitable for mounting on a stand		N/A
1.7 (4.13.6)	Tumbling barrel		N/A
<b>1.7 (4.14)</b>	<b>Suspensions, fixings and means of adjusting</b>		<b>P</b>
1.7 (4.14.1)	Mechanical load:		P
	A) four times the weight	For model MYL-A150: Max. 7,8Kg x 4 = 31,2Kg	P
	B) torque 2,5 Nm		N/A
	C) bracket arm; bending moment (Nm)..... :		N/A
	D) load track-mounted luminaires		N/A
	E) clip-mounted luminaires, glass-shelve. Thickness (mm) .....		N/A
	Metal rod. diameter (mm) .....		N/A
	Fixed luminaire or independent control gear without fixing devices		N/A
1.7 (4.14.2)	Load to flexible cables		N/A
	Mass (kg) .....		—
	Stress in conductors (N/mm <sup>2</sup> ) .....		N/A
	Mass (kg) of semi-luminaire .....		N/A
	Bending moment (Nm) of semi-luminaire .....		N/A
1.7 (4.14.3)	Adjusting devices:		N/A
	- flexing test; number of cycles..... :		N/A
	- strands broken..... :		N/A
	- electric strength test afterwards		N/A
1.7 (4.14.4)	Telescopic tubes: cords not fixed to tube; no strain on conductors		N/A
1.7 (4.14.5)	Guide pulleys		N/A
1.7 (4.14.6)	Strain on socket-outlets		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>1.7 (4.15)</b>	<b>Flammable materials</b>		<b>N/A</b>
	- glow-wire test 650°C..... :	See Test Table 1.15 (13.3.2)	N/A
	- spacing $\geq 30$ mm		N/A
	- screen withstanding test of 13.3.1		N/A
	- screen dimensions		N/A
	- no fiercely burning material		N/A
	- thermal protection		N/A
	- electronic circuits exempted		N/A
1.7 (4.15.2)	Luminaires made of thermoplastic material with lamp control gear		N/A
	a) construction		N/A
	b) temperature sensing control		N/A
	c) surface temperature		N/A
<b>1.7 (4.16)</b>	<b>Luminaires for mounting on normally flammable surfaces</b>		<b>P</b>
	No lamp control gear..... :	(compliance with Section 12)	N/A
	Provided with adaptor for a track meet the requirements for direct mounting on normally flammable surfaces		N/A
1.7 (4.16.1)	Lamp control gear spacing:		N/A
	- spacing 35 mm		N/A
	- spacing 10 mm		N/A
1.7 (4.16.2)	Thermal protection:		N/A
	- in lamp control gear		N/A
	- external		N/A
	- fixed position		N/A
	- temperature marked lamp control gear		N/A
1.7 (4.16.3)	Design to satisfy the test of 12.6	(see clause 12.6)	N/A
<b>1.7 (4.17)</b>	<b>Drain holes</b>		<b>N/A</b>
	Clearance at least 5 mm		N/A
<b>1.7 (4.18)</b>	<b>Resistance to corrosion</b>		<b>P</b>
1.7 (4.18.1)	- rust-resistance		P
1.7 (4.18.2)	- season cracking in copper		N/A
1.7 (4.18.3)	- corrosion of aluminium		P
1.7 (4.19)	Igniters compatible with ballast		N/A
1.7 (4.20)	Rough service vibration		N/A
<b>1.7 (4.21)</b>	<b>Protective shield</b>		<b>N/A</b>

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.7 (4.21.1)	Shield fitted if tungsten halogen lamps or metal halide lamps		N/A
	Shield of glass if tungsten halogen lamps		N/A
1.7 (4.21.2)	Particles from a shattering lamp not impair safety		N/A
1.7 (4.21.3)	No direct path		N/A
1.7 (4.21.4)	Impact test on shield		N/A
	Glow-wire test on lamp compartment..... :	See Test Table 1.15 (13.3.2)	N/A
1.7 (4.22)	Attachments to lamps not cause overheating or damage		N/A
1.7 (4.23)	Semi-luminaires comply Class II		N/A
<b>1.7 (4.24)</b>	<b>Photobiological hazards</b>		<b>P</b>
1.7 (4.24.1)	No excessive UV radiation if tungsten halogen lamps and metal halide lamps (Annex P)		N/A
1.7 (4.24.2)	Retinal blue light hazard		P
	Class of risk group assessed according to IEC/TR 62778 .....	RG1 unlimited	—
	Luminaires with $E_{thr}$ :		N/A
	a) Fixed luminaires		N/A
	- distance x m, borderline between RG1 and RG2. . :		N/A
	- marking and instruction according 3.2.23		N/A
	b) Portable and handheld luminaires		N/A
	- marking according 3.2.23 if RG1 exceeded at 200 mm according to IEC/TR 62778		N/A
	Portable luminaires for children IEC 60598-2-10 and Mains socket outlet nightlights IEC 60598-2-12 not exceed RG1 at 200 mm according to IEC/62778		N/A
<b>1.7 (4.25)</b>	<b>Mechanical hazard</b>		<b>P</b>
	No sharp point or edges		P
<b>1.7 (4.26)</b>	<b>Short-circuit protection</b>		N/A
1.7 (4.26.1)	Adequate means of uninsulated accessible SELV / PELV parts		N/A
1.7 (4.26.2)	Short-circuit test with test chain according 4.26.3:		N/A
	Supply source ES1 PSE		N/A
	Test chain not melt through		N/A
	Test sample not exceed values of Table 12.1 and 12.2		N/A
<b>1.7 (4.27)</b>	<b>Terminal blocks with integrated screwless protective earthing contacts</b>		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Test according Annex V		N/A
	Pull test of terminal fixing (20 N)		N/A
	After test, resistance < 0,05 $\Omega$		N/A
	Pull test of mechanical connection (50 N)		N/A
	After test, resistance < 0,05 $\Omega$		N/A
	Voltage drop test, resistance < 0,05 $\Omega$		N/A
<b>1.7 (4.28)</b>	<b>Fixing of thermal sensing control</b>		N/A
	Not plug-in or easily replaceable type		N/A
	Reliably kept in position		N/A
	No adhesive fixing if UV radiations from a lamp can degrade the fixing		N/A
	Not outside the luminaire enclosure		N/A
	Test of adhesive fixing:		N/A
	Max. temperature on adhesive material ( $^{\circ}\text{C}$ ) ..... :		—
	100 cycles between t min and t max		N/A
	Temperature sensing control still in position		N/A
<b>1.7 (4.29)</b>	<b>Luminaires with non-replaceable light source</b>		N/A
	Not possible to replace light source		N/A
	Live part not accessible after parts have been opened by hand or tools		N/A
<b>1.7 (4.30)</b>	<b>Luminaires with non-user replaceable light source</b>		P
	If protective cover provide protection against electric shock and marked with "caution, electric shock risk" symbol:		P
	At least one fixing means requiring use of tool		P
<b>1.7 (4.31)</b>	<b>Insulation between circuits</b>		<b>P</b>
	Circuits insulated from LV supply fulfil requirements according 4.31.1 – 4.31.3		P
	Controllable luminaires requiring same level of insulation for all components, the insulation between control terminals and LV supply fulfil requirements according 4.31.1 – 4.31.3		N/A
<b>1.7 (4.31.1)</b>	<b>SELV or PELV circuits</b>		<b>P</b>
	Used SELV/PELV source		P
	Voltage $\leq$ ELV		P
	Insulating of SELV/PELV circuits from LV supply		P
	Insulating of SELV/PELV circuits from other non SELV/PELV circuits		N/A



IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Insulating of SELV/PELV circuits from FELV		N/A
	Insulating of SELV/PELV circuits from other SELV/PELV circuits		N/A
	SELV/PELV circuits insulated from accessible parts according Table X.1		P
	Plugs not able to make any electrical contact with socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Plugs and socket-outlets does not have protective conductor contact		N/A
1.7 (4.31.2)	FELV circuits		N/A
	Used FELV source		N/A
	Voltage $\leq$ ELV		N/A
	Insulating of FELV circuits from LV supply		N/A
	FELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to make any electrical contact with socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Socket-outlets have protective conductor contact		N/A
1.7 (4.31.3)	Other circuits		N/A
	Other circuits insulated from accessible parts according Table X.1		N/A
	Class II construction with equipotential bonding for protection against indirect contacts with live parts:		N/A
	- conductive parts are connected together		N/A
	- test according 7.2.3		N/A
	- conductive part not cause an electric shock in case of an insulation fault		N/A
	- equipotential bonding in master/slave applications		N/A
	- master luminaire provided with terminal for accessible conductive parts of slave luminaires		N/A
	- slave luminaire constructed as class I		N/A
1.7 (4.32)	<b>Overvoltage protective devices</b>		N/A
	Comply with IEC 61643-11		N/A
	External to controlgear and connected to earth:		N/A
	- only in fixed luminaires		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- only connected to protective earth		N/A
<b>1.6 (4.33)</b>	<b>Luminaire powered via information technology communication cabling</b>		N/A
	Requirements for Class III luminaire		N/A
	Rated voltage within the range of ES1 and does not exceed maximum voltage of used connector		N/A
	Luminaire does not create any hazard from overvoltage	(see Annex 2)	N/A
<b>1.6 (4.34)</b>	<b>Electromagnetic fields (EMF)</b>		P
	No harmful electromagnetic fields		P
<b>1.6 (4.35)</b>	<b>Protection against moving fan blades</b>		N/A
	Test with a standard test finger		N/A
	Test with test probe acc. to Figure 13 (IEC 61032) for portable luminaire		N/A
	Blades rounded with radius $\geq 0.5$ mm and:		N/A
	-hardness less than D60 Shore		N/A
	-peripheral speed less than 15 m/s		N/A
	-input power of fan $\leq 2$ W at rated voltage		N/A
<b>1.6 (4.36)</b>	<b>Track-mounted luminaires</b>		N/A
	Test in accordance with Annex A of IEC60570:2003/AMD2:2019		N/A
<b>1.8 (11)</b>	<b>CREEPAGE DISTANCES AND CLEARANCES</b>		P
1.8 (11.2.1)	Impulse withstand category (Normal category II)	Category II <input checked="" type="checkbox"/> Category III <input type="checkbox"/>	—
	Category III according Annex U		N/A
	Protected against pollution, reduced creepage and clearance according Annex P of IEC 61347-1		N/A
1.8 (11.2.2)	Creepage distances for frequency up to 30 kHz	See Test Table 1.7 (11.2) I	P
	Creepage distances for frequency over 30 kHz:		N/A
	- Controlgear marked with $\hat{U}_{OUT}$ and $f_{UOUT}$ according IEC 61347-1, clause 7.1, item w	See Test Table 1.7 (11.2) II	N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347	See Test Table 1.7 (11.2) II	N/A
1.8 (11.2.3)	Clearances for frequency up to 30 kHz	See Test Table 1.7 (11.2) I	P
	Clearances distances for frequency over 30 kHz:		N/A
	- Controlgear marked with $U_P$	See Test Table 1.7 (11.2) II	N/A
	- Requirements according IEC 60664-4 for controlgear not covered by IEC 61347	See Test Table 1.7 (11.2) II	N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.9 (7)	PROVISION FOR EARTHING		P
1.9 (7.2.1 + 7.2.3)	Accessible metal parts		P
	Metal parts in contact with supporting surface		P
	Resistance < 0,5 $\Omega$ ..... :	0,05 $\Omega$	P
	Self-tapping screws used		N/A
	Thread-forming screws		N/A
	Thread-forming screw used in a groove		N/A
	Protective earth makes contact first		P
	Terminal blocks with integrated screwless protective earthing contacts tested according Annex V		N/A
	Protective earthing of the luminaire not via built-in control gear		P
1.9 (7.2.2 + 7.2.3)	Protective earth continuity in joints, etc.		P
1.9 (7.2.4)	Locking of clamping means		P
	Compliance with 4.7.3		P
1.9 (7.2.5)	Protective earth terminal integral part of connector socket		N/A
1.9 (7.2.6)	Protective earth terminal adjacent to mains terminals		P
1.9 (7.2.7)	Electrolytic corrosion of the protective earth terminal		P
1.9 (7.2.8)	Material of protective earth terminal		P
	Contact surface bare metal		P
1.9 (7.2.10)	Class II luminaire for looping-in		N/A
	Double or reinforced insulation to functional earth		N/A
1.9 (7.2.11)	Protective earthing core coloured green-yellow		P
	Length of protective earthing conductor		P
1.9 (7.2.12)	PELV circuit connected to protective earth for functional purpose		N/A

1.10 (14)	SCREW TERMINALS		N/A
	Separately approved; component list	(see Annex 1)	N/A
	Part of the luminaire	(see Annex 3)	N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>1.10 (15)</b>	<b>SCREWLESS TERMINALS AND ELECTRICAL CONNECTIONS</b>		N/A
	Separately approved; component list..... :	(see Annex 1)	N/A
	Part of the luminaire ..... :	(see Annex 4)	N/A
<b>1.11 (5)</b>	<b>EXTERNAL AND INTERNAL WIRING</b>		P
<b>1.11 (5.2)</b>	<b>Supply connection and external wiring</b>		<b>P</b>
1.11 (5.2.1)	Means of connection..... :	Supply cord	P
	Outdoor luminaire has not PVC insulated external wiring if not Class III or SELV/PELV circuits $\leq 25$ V AC/60 V DC/25 V peak interrupted DC voltage with frequency 10Hz -200 Hz or protected from outdoor environment		N/A
1.11 (5.2.2)	Type of cable..... :	H05RN-F	P
	Nominal cross-sectional area (mm <sup>2</sup> )..... :	3x1,0mm <sup>2</sup>	P
	Cables equal to IEC 60227 or IEC 60245		P
1.11 (5.2.3)	Type of attachment, X, Y or Z	Type Y	P
1.11 (5.2.5)	Type Z not connected to screws		N/A
1.11 (5.2.6)	Cable entries:		P
	- suitable for introduction		P
	- adequate degree of protection		P
1.11 (5.2.7)	Cable entries through rigid material have rounded edges		P
1.11 (5.2.8)	Insulating bushings:		N/A
	- suitably fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- tubes or guards made of insulating material		N/A
1.11 (5.2.9)	Locking of screwed bushings		N/A
1.11 (5.2.10)	Cord anchorage:		P
	- covering protected from abrasion		P
	- clear how to be effective		P
	- no mechanical or thermal stress		P
	- no tying of cables into knots etc.		P
	- insulating material or lining		P
1.11 (5.2.10.1)	Cord anchorage for type X attachment:		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	a) at least one part fixed		N/A
	b) types of cable		N/A
	c) no damaging of the cable		N/A
	d) whole cable can be mounted		N/A
	e) no touching of clamping screws		N/A
	f) metal screw not directly on cable		N/A
	g) replacement without special tool		N/A
	Glands not used as anchorage		N/A
	Labyrinth type anchorages		N/A
1.11 (5.2.10.2)	Adequate cord anchorage for type Y and type Z attachment	Type Y	P
1.11 (5.2.10.3)	Tests:		P
	- impossible to push cable; unsafe		P
	- pull test: 25 times; pull (N)..... : 60	60	P
	- torque test: torque (Nm) ..... : 0,25	0,25	P
	- displacement $\leq 2$ mm	Max 0,7mm	P
	- no movement of conductors		P
	- no damage of cable or cord		P
	- function independent of electrical connection		P
1.11 (5.2.10.4)	Luminaire with/designed for use with supply cord with maximum current of 2A:		N/A
	- Ordinary Class III luminaire supplied with SELV $\leq 25V$ RMS/60V DC		N/A
	- Ordinary Class III luminaire supplied with PELV $\leq 12V$ RMS/30V DC		N/A
	- Other than ordinary Class III luminaire supplied with voltage $\leq 12V$ RMS/30V DC		N/A
	Pull test of 30N		N/A
1.11 (5.2.11)	External wiring passing into luminaire		P
1.11 (5.2.12)	Looping-in terminals		N/A
1.11 (5.2.13)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		P

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.11 (5.2.14)	Mains plug same protection		N/A
	Class III luminaire plug		N/A
	No unsafe compatibility		N/A
1.11 (5.2.15)	Connectors for Class III luminaires (IEC 60603 or IEC 62680)		N/A
1.11 (5.2.16)	Appliance inlets (IEC 60320)		N/A
	Installation couplers (IEC 61535)		N/A
	Appliance inlet or connector systems (IEC 61984)		P
1.11 (5.2.17)	No standardized interconnecting cables properly assembled		N/A
1.11 (5.2.18)	Used plug in accordance with		N/A
	- IEC 60083		N/A
	- other standard		N/A
<b>1.11 (5.3)</b>	<b>Internal wiring</b>		<b>P</b>
1.11 (5.3.1)	Internal wiring of suitable size and type		P
	Through wiring		N/A
	- not delivered/ mounting instruction		N/A
	- factory assembled		N/A
	- socket outlet loaded (A)..... :		N/A
	- temperatures ..... :	(see Annex 2)	N/A
	Green-yellow for protective earth only		P
1.11 (5.3.1.1)	Internal wiring connected directly to fixed wiring		P
	Cross-sectional area (mm <sup>2</sup> )..... :	See Annex 1	P
	Insulation thickness (mm) ..... :	See Annex 1	N/A
	Extra insulation added where necessary		N/A
1.11 (5.3.1.2)	Internal wiring connected to fixed wiring via internal current-limiting device		P
	Cross-sectional area (mm <sup>2</sup> )..... :	See Annex 1	P
1.11 (5.3.1.3)	Double or reinforced insulation for class II		N/A
1.11 (5.3.1.4)	Conductors without insulation		N/A
1.11 (5.3.1.5)	SELV/PELV current-carrying parts		P

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
1.11 (5.3.1.6)	Insulation thickness other than PVC or rubber		N/A
1.11 (5.3.2)	Sharp edges etc.		P
	No moving parts of switches etc.		N/A
	Joints, raising/lowering devices		N/A
	Telescopic tubes etc.		N/A
	No twisting over 360°		P
1.11 (5.3.3)	Insulating bushings:		N/A
	- suitable fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- cables with protective sheath		N/A
1.11 (5.3.4)	Joints and junctions effectively insulated		N/A
1.11 (5.3.5)	Strain on internal wiring		N/A
1.11 (5.3.6)	Wire carriers		N/A
1.11 (5.3.7)	Wire ends not tinned		P
	Wire ends tinned: no cold flow		N/A
<b>1.11 (5.4)</b>	<b>Test to determine suitability of conductors having a reduced cross-sectional area</b>		<b>N/A</b>
	Under test the temperature of the luminaire wiring insulation not exceed the limits stated in Table 12.2	(see Annex 2)	N/A
	No damage to luminaire wiring after test		N/A

<b>1.12 (8)</b>	<b>PROTECTION AGAINST ELECTRIC SHOCK</b>		<b>P</b>
1.12 (8.2.1)	Live parts not accessible		P
	Basic insulated parts not used on the outer surface without appropriate protection		P
	Basic insulated parts not accessible with standard test finger on portable, settable and adjustable luminaires		N/A
	Basic insulated parts not accessible with Ø 50 mm probe from outside, other types of luminaires		P
	Lamp and starter holders in portable and adjustable luminaires comply with double or reinforced insulation requirements		N/A
	Basic insulation only accessible under lamp or starter replacement		P
	Protection in any position		P

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Double-ended tungsten filament lamp		N/A
	Insulation lacquer not reliable		P
	Double-ended high-pressure discharge lamp		N/A
	Relevant warning according to 3.2.18 fitted to the luminaire		N/A
1.12 (8.2.2)	Portable luminaire adjusted in most unfavourable position		N/A
1.12 (8.2.3.a)	Class II luminaire:		N/A
	- basic insulated metal parts not accessible		N/A
	- required insulation from live parts in compliance with Table X.1		N/A
	- glass protective shields not used as supplementary insulation		N/A
1.12 (8.2.3.b)	BC lamp holder of metal in class I luminaires shall be connected to protective earth		N/A
1.12 (8.2.3.c)	SELV circuits with exposed current carrying parts:		N/A
	Ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V) .....		N/A
	- voltage under load/ no-load DC (V).....		N/A
	- interrupted DC voltage (V) .....		N/A
	- touch current if applicable (mA) .....		N/A
	One conductive part insulated if required		N/A
	Other than ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V) .....		N/A
	- voltage under load/ no-load DC (V).....		N/A
	- interrupted DC voltage (V) .....		N/A
	Class III luminaire only for connection to SELV/PELV		N/A
1.12 (8.2.3.d)	PELV circuits with exposed current carrying parts:		N/A
	Ordinary luminaire:		N/A
	- voltage under load/ no-load AC (V) .....		N/A
	- voltage under load/ no-load DC (V).....		N/A
	Other than ordinary luminaire:		N/A



IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- voltage under load/ no-load AC (V) .....		N/A
	- voltage under load/ no-load DC (V).....		N/A
	One pole insulated if required		N/A
1.12 (8.2.4)	Portable luminaire has protection independent of supporting surface		N/A
1.12 (8.2.5)	Compliance with the standard test finger or relevant probe		P
1.12 (8.2.6)	Covers reliably secured		P
1.12 (8.2.7)	Luminaire other than below with capacitor > 0,5 $\mu$ F not exceed 50 V 1 min after disconnection	4V after 1min.	P
	Portable luminaire with capacitor > 0,1 $\mu$ F (0.25) not exceed 34 V 1 s after disconnection		N/A
	Other luminaires with capacitor > 0,1 $\mu$ F (0.25) with plug and track adaptors not exceed 60 V 5 s after disconnection		N/A

<b>1.13 (12)</b>	<b>ENDURANCE TEST AND THERMAL TEST</b>		<b>P</b>
1.13 (-)	If IP > IP 20 relevant test of (12.4), (12.5), (12.6) and (12.7) after (9.2) before (9.3) as specified in 1.14		—
<b>1.13 (12.2)</b>	<b>Selection of lamps and ballasts</b>		—
	Lamp used according Annex B	(Lamp used see Annex 2)	—
	Control gear if separate and not supplied	(Control gear used see Annex 2)	—
<b>1.13 (12.3)</b>	<b>Endurance test</b>		<b>P</b>
	a) mounting position .....	According to manual instruction	—
	b) test temperature ( $^{\circ}$ C).....	55	—
	c) total duration (h) .....	240	—
	d) supply voltage (V).....	1,1 x 240V=264V	—
	d) if not equipped with control gear, constant voltage/current (V) or (A) .....	--	—
1.13 (12.3.1d)	d) Class III luminaires powered via information technology communication cable:		N/A
	- voltage under normal operation (V).....		—
	- voltage under abnormal operation (V).....		—
	e) luminaire ceases to operate		—
	f) luminaire with constant light output function		N/A
1.13 (12.3.2)	After endurance test:		<b>P</b>

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- no part unserviceable		P
	- luminaire not unsafe		P
	- no damage to track system		N/A
	- marking legible		P
	- no cracks, deformation etc.		P
<b>1.13 (12.4)</b>	<b>Thermal test (normal operation)</b>	(see Annex 2)	P
<b>1.13 (12.5)</b>	<b>Thermal test (abnormal operation)</b>	(see Annex 2)	N/A
<b>1.13 (12.6)</b>	<b>Thermal test (failed lamp control gear condition):</b>		<b>N/A</b>
1.13 (12.6.1)	Through wiring or looping-in wiring loaded by a current of (A) .....		—
	- case of abnormal conditions.....		—
	- electronic lamp control gear		N/A
	- measured winding temperature (°C): at 1,1 Un .....		—
	- measured mounting surface temperature (°C) at 1,1 Un .....		N/A
	- calculated mounting surface temperature (°C) .....		N/A
	- track-mounted luminaires		N/A
1.13 (12.6.2)	Temperature sensing control		N/A
	- case of abnormal conditions.....		—
	- thermal link		N/A
	- manual reset cut-out		N/A
	- auto reset cut-out		N/A
	- measured mounting surface temperature (°C) .....		N/A
	- track-mounted luminaires		N/A
<b>1.13 (12.7)</b>	<b>Thermal test (failed lamp control gear in plastic luminaires):</b>		<b>N/A</b>
1.13 (12.7.1)	Luminaire without temperature sensing control		N/A
1.13 (12.7.1.1)	Luminaire with fluorescent lamp ≤ 70W		N/A
	Test method 12.7.1.1 or Annex W .....		—
	Test according to 12.7.1.1:		N/A
	- case of abnormal conditions.....		—
	- Ballast failure at supply voltage (V) .....		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Test according to Annex W:		N/A
	- case of abnormal conditions..... :		—
	- measured winding temperature (°C): at 1,1 Un..... :		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un..... :		—
	- calculated temperature of fixing point/exposed part (°C)..... :		—
	Ball-pressure test..... :	See Test Table 1.15 (13.2.1)	N/A
1.13 (12.7.1.2)	Luminaire with discharge lamp, fluorescent lamp > 70W, transformer > 10 VA		N/A
	- case of abnormal conditions..... :		—
	- measured winding temperature (°C): at 1,1 Un..... :		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un..... :		—
	- calculated temperature of fixing point/exposed part (°C)..... :		—
	Ball-pressure test..... :	See Test Table 1.15 (13.2.1)	N/A
1.13 (12.7.1.3)	Luminaire with short circuit proof transformers ≤ 10 VA		N/A
	- case of abnormal conditions..... :		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
1.13 (12.7.2)	Luminaire with temperature sensing control		N/A
	- thermal link..... :	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- manual reset cut-out..... :	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- auto reset cut-out..... :	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- case of abnormal conditions..... :		—
	- highest measured temperature of fixing point/exposed part (°C):..... :		—
	Ball-pressure test:..... :	See Test Table 1.15 (13.2.1)	N/A
<b>1.14 (9)</b>	<b>RESISTANCE TO DUST AND MOISTURE</b>		<b>P</b>
1.14 (-)	If IP > IP 20 the order of tests as specified in clause 1.12		P
1.14 (9.2)	Tests for ingress of dust, solid objects and moisture:		P
	- classification according to IP..... :	IP66	—

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- mounting position during test..... :	According to manual instruction	—
	- fixing screws tightened; torque (Nm) ..... :	Fixed glass cover, Fixed enclosure of LED driver: 0,8Nm; Metal gland: 4,16Nm	—
	- tests according to clauses..... :	Clause 9.2.2 and 9.2.7	—
	- electric strength test afterwards	Details see clause 10.2.2	P
	a) no deposit in dust-proof luminaire		N/A
	b) no talcum in dust-tight luminaire		P
	c) no trace of water on current-carrying parts or on insulation where it could become a hazard		P
	c.1) For luminaires without drain holes – no water entry		P
	c.2) For luminaires with drain holes – no hazardous water entry		N/A
	d) no water in watertight, pressure watertight, high pressure and temperature water jet-proof or high pressure and cold water jet-proof luminaire		N/A
	e) no contact with live parts (IP 2X)		N/A
	e) no entry into enclosure (IP 3X and IP 4X)		N/A
	e) no contact with live parts through drain holes and ventilation slots (IP3X and IP4X)		N/A
	f) no trace of water on part of lamp requiring protection from splashing water		N/A
	g) no damage of protective shield or glass envelope		P
1.14 (9.3)	Humidity test 48 h	Relative humidity 93%, temperature 25°C, 48h	P

<b>1.15 (10)</b>	<b>INSULATION RESISTANCE AND ELECTRIC STRENGTH</b>		<b>P</b>
1.15 (10.2.1)	Insulation resistance test		P
	Cable or cord covered by metal foil or replaced by a metal rod of mm Ø ..... :	Covered by metal foil	—
	Insulation resistance (MΩ):		—
	SELV/PELV:		P
	- between current-carrying parts of different polarity :		N/A
	- between current-carrying parts and mounting surface..... :	100MΩ	P
	- between current-carrying parts and metal parts of the luminaire ..... :	100MΩ	P

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts .....		N/A
	- Insulation bushings as described in Section 5 .....		N/A
	Other than SELV/PELV:		P
	- between live parts of different polarity.....	LED driver approved	N/A
	- between live parts and mounting surface .....	100M $\Omega$	P
	- between live parts and metal parts.....	100M $\Omega$	P
	- between live parts of different polarity through action of a switch .....		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts .....	100M $\Omega$	P
	- Insulation bushings as described in Section 5 .....		N/A
1.15 (10.2.2)	Electric strength test		P
	Dummy lamp		N/A
	Luminaires with ignitors after 24 h test		N/A
	Luminaires with manual ignitors		N/A
	Test voltage (V):		P
	SELV/PELV:		P
	- between current-carrying parts of different polarity :		N/A
	- between current-carrying parts and mounting surface.....	500V	P
	- between current-carrying parts and metal parts of the luminaire .....	500V	P
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts .....		N/A
	- Insulation bushings as described in Section 5 .....		N/A
	Other than SELV/PELV:		P
	- between live parts of different polarity.....	LED driver approved	N/A
	- between live parts and mounting surface .....	1480V	P
	- between live parts and metal parts.....	1480V	P
	- between live parts of different polarity through action of a switch .....		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts .....	1480V	P

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- Insulation bushings as described in Section 5 ..... :		N/A
1.15 (10.3)	Touch current (mA).....:	Protective conductor current: 0,07mA < 3,5mA	P
	Protective conductor current (mA).....:		N/A
<b>1.16 (13)</b>	<b>RESISTANCE TO HEAT, FIRE AND TRACKING</b>		P
1.16 (13.2.1)	Ball-pressure test.....:	See Test Table 1.16 (13.2.1)	P
1.16 (13.3.1)	Needle-flame test (10 s).....:	See Test Table 1.16 (13.3.1)	N/A
1.16 (13.3.2)	Glow-wire test (650°C).....:	See Test Table 1.16 (13.3.2)	P
1.16 (13.4)	Proof tracking test (IEC 60112) .....	See Test Table 1.16 (13.4)	N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

1.8 (11.2)	TABLE I: Creepage distances and clearances							P
	Minimum distances (mm) for a.c. up to 30 kHz sinusoidal voltages							P
	Applicable part of IEC 60598-1 Table 11.1.A*, 11.1.B* and 11.2*							P
	Insulation type **	Measured clearance	Required		Measured creepage	Required		
			clearance	*Table		creepage	*Table	
Distance 1:	B	1,6	0,5	11.1.B	1,6	1,3	11.1.B	
Working voltage (V).....:					240V		—	
PTI.....:					< 600 <input checked="" type="checkbox"/> ≥ 600 <input type="checkbox"/>		—	
Pulse voltage or $U_p$ if applicable (kV) .....					--		—	
Supplementary information: Between live parts of different polarity of LED module Approved SELV LED driver XLG-150-H-A, Max, 60Vdc output								
Distance 2:	B	7,6	1,5	11.1B	7,6	2,5	11.1A	
Working voltage (V).....:					240V		—	
PTI.....:					< 600 <input checked="" type="checkbox"/> ≥ 600 <input type="checkbox"/>		—	
Pulse voltage or $U_p$ if applicable (kV) .....					--		—	
Supplementary information: Between live parts and accessible metal parts								
Distance 3:	B	7,6	1,5	11.1B	7,6	2,5	11.1A	
Working voltage (V).....:					240V		—	
PTI.....:					< 600 <input checked="" type="checkbox"/> ≥ 600 <input type="checkbox"/>		—	
Pulse voltage or $U_p$ if applicable (kV) .....					--		—	
Supplementary information: Between Live part and the supporting surface								

\*\* Insulation type: B – Basic; S – Supplementary; R – Reinforced. See also IEC 60598-1 Annex M.

1.8 (11.2)	TABLE II: Creepage distances and clearances							N/A
	Minimum distances (mm) for a.c. higher than 30 kHz sinusoidal voltages							
	Applicable part of IEC 61347-1 Table 7 and 8* or IEC 60664-4 Table 1 and 2							
Distances	Insulation type **	Measured clearance	Required		Measured creepage	Required		
			clearance	*Table		creepage	*Table	
Distance 1:	--	--	--	--	--	--	--	
Working voltage (V).....:					--		—	
Frequency if applicable (kHz) .....					--		—	
PTI.....:					< 600 <input type="checkbox"/> ≥ 600 <input type="checkbox"/>		—	
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV) .....					--		—	

IEC 60598-2-1							
Clause	Requirement + Test				Result - Remark		Verdict
Supplementary information: --							
Distance 2:	--	--	--	--	--	--	--
Working voltage (V).....:	--				--		---
Frequency if applicable (kHz).....:	--				--		---
PTI.....:	--				< 600 <input type="checkbox"/> ≥ 600 <input type="checkbox"/>		---
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV).....:	--				--		---
Supplementary information: --							
Distance 3:	--	--	--	--	--	--	--
Working voltage (V).....:	--				--		---
Frequency if applicable (kHz).....:	--				--		---
PTI.....:	--				< 600 <input type="checkbox"/> ≥ 600 <input type="checkbox"/>		---
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV).....:	--				--		---
Supplementary information: --							

\*\* Insulation type: B – Basic; S – Supplementary; R – Reinforced.

1.16 (13.2.1)	TABLE: Ball Pressure Test of Thermoplastics				P
Allowed impression diameter (mm).....:	2				---
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)		
LED lens	See Annex 1	103	0,8		
Supplementary information: --					

1.16 (13.3.1)	TABLE: Needle-flame test					N/A
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict	
--	--	--	--	--	--	
Supplementary information: --						

1.16 (13.3.2)	TABLE: Resistance to heat and fire - Glow wire tests					P
Object/ Part No./ Material	Manufacturer/ trademark	GWT (°C): 650			Verdict	
		$t_E$ (s)	$t_I$ (s)	$t_R$ (s)		



IEC 60598-2-1							
Clause	Requirement + Test			Result - Remark		Verdict	
LED lens	See Annex 1			0	0	0	P
Ignition of the specified layer placed underneath the test specimen (Yes/No) .....							No
Supplementary information: --							

1.16 (13.4)	TABLE: Proof tracking test				N/A
Test voltage PTI .....	175 V				—
Object/ Part No./ Material	Manufacturer/ trademark	Withstand 50 drops without failure on three places or on three specimens			Verdict
--	--	--	--	--	--
Supplementary information: --					

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 1 TABLE: Critical components information						P
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity <sup>1)</sup>
Supply cord	B	Dong Guan Recheer Electric Wire & Cable Co., Ltd.	H05RN-F, H07RN-F	3x1.0mm <sup>2</sup>	EN 50525-2-21:2011	VDE 40015173
LED driver	B	MEAN WELL Enterprises Co., Ltd.	XLG-100-H-A	Input: 100-240Vac; 50/60Hz; 1,1A Output: 27-56Vdc; Max. 60Vdc; 1,75-2,8A; 100W; ta:50°C(100-200V ac); ta:60°C(200-240V ac); tc:90°C; IP67; Independent, Class I; SELV	IEC 61347-1:2015+A1:2017 IEC 61347-2-11:2001+A1:2017	DEKRA CB NL-58175
LED driver	B	MEAN WELL Enterprises Co., Ltd.	XLG-150-H-A	Input: 100-240Vac; 50/60Hz; 2,0A Output: 27-56Vdc; Max. 60Vdc; 2,68-4,17A; 150W; ta:40°C(100-200V ac); ta:55°C(200-240V ac); tc:90°C; IP67; Independent, Class I; SELV	IEC 61347-1:2015+A1:2017 IEC 61347-2-11:2001+A1:2017	DEKRA CB NL-58676
Connection device	B	Shenzhen Lilutong Electronic Technology Co.,Ltd	LLT-M15-15003M3054; LLT-M15-15003F3064	AC 250V; 15A; 1,0mm <sup>2</sup> ; IP67; 105°C	EN 61984:2009	TUV SUD B 090230 0010 Rev. 00
Input wire of LED	B	Dong Guan Recheer Electric Wire & Cable Co., Ltd.	H05RN-F, H07RN-F	2x1.0mm <sup>2</sup>	EN 50525-2-21:2011	VDE 40015173
LED PCB	C	NINGBO KJPCB ELECTRONIC TECHNOLOGY CO LTD	KJ-01	V-0, 100°C	IEC 60598-1:2020 IEC 60598-2-1:2020	UL E474795 Tested with appliance
LED chip	C	LUMILEDS	L130-xxxx003000x21	IF: 240mA; VF: 5,8-6,6V; CCT: 2200-5000K	IEC/TR 62778:2014	Tested with appliance

IEC 60598-2-1						
Clause	Requirement + Test			Result - Remark		Verdict
LED lens	C	TEIJIN Chemicals Plastic Compounds Shanghai Ltd	L- 1225U(#)(f1), L- 1225V(#)(f1), L- 1225Z(#1)(f1)	PC; V-2; 115°C	IEC 60598- 1:2020 IEC 60598-2- 1:2020	UL E244324 Test with appliance
<p>Supplementary information:</p> <p><sup>1)</sup> Provided evidence ensures the agreed level of compliance. See OD-CB2039.</p> <p>The codes above have the following meaning:</p> <p>A - The component is replaceable with another one, also certified, with equivalent characteristics</p> <p>B - The component is replaceable if authorised by the test house</p> <p>C - Integrated component tested together with the appliance</p> <p>D - Alternative component</p>						

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 2	TABLE: Thermal tests of Section 12			P			
1	Type reference.....	MYL-A150		—			
	Lamp used .....	LED module		—			
	Lamp control gear used.....	XLG-150-H-A		—			
	Mounting position of luminaire.....	Normal mounting		—			
	Supply wattage (W).....	152,6		—			
	Supply current (A).....	0,621		—			
	Temperatures in test 1 - 4 below are corrected for ta (°C) .....	45		—			
	- abnormal operating mode.....	--		—			
1.12 (12.4)	- test 1: rated voltage .....	240V; 0,663A; 155,1W		—			
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current .....	1,06x240V=254,4V		—			
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage.....	--		—			
	Through wiring or looping-in wiring loaded by a current of A during the test .....	--		—			
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current or 130/150% of rated input voltage .....	--		—			
Temperature measurements (°C)							
Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Supply cord	45	--	51,2	--	90	--	--
Connection device for input wire of LED driver	45	--	49,8	--	105	--	--
tc of LED driver	45	72,4	--	--	90	--	--
Connection device for output wire of LED driver	45	--	52,5	--	90	--	--
Input wire near LED	45	--	78,1	--	90	--	--
LED PCB	45	--	79,8	--	Ref.	--	--
LED lens	45	--	77,5	--	Ref.	--	--
Glass cover	45	--	68,2	--	90	--	--
Metal cover	45	--	66,7	--	Ref.	--	--
Mounting surface	45	--	46,3	--	90	--	--
Lighting surface (10cm)	45	--	53,6	--	90	--	--

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

Supplementary information:

ANNEX 2	TABLE: Thermal tests of Section 12			P			
2	Type reference.....	MYL-A100		—			
	Lamp used .....	LED module		—			
	Lamp control gear used.....	XLG-100-H-A		—			
	Mounting position of luminaire.....	Normal mounting		—			
	Supply wattage (W).....	106,2		—			
	Supply current (A).....	0,443		—			
	Temperatures in test 1 - 4 below are corrected for ta (°C) .....	45		—			
	- abnormal operating mode.....	--		—			
1.12 (12.4)	- test 1: rated voltage .....	240V		—			
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current .....	--		—			
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage.....	--		—			
	Through wiring or looping-in wiring loaded by a current of A during the test .....	--		—			
1.12 (12.5)	- test 4: 1,1 times rated voltage or 1,05 times rated wattage or 1,1 times constant voltage/current or 130/150% of rated input voltage .....	--		—			
Temperature measurements (°C)							
Part	Ambient	Cl. 12.4 – normal				Cl. 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
tc of LED driver	45,0	77,8	--	--	90	--	--
Supplementary information:							

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict

<b>ANNEX 3</b>	<b>Screw terminals (part of the luminaire)</b>		N/A
<b>(14)</b>	<b>SCREW TERMINALS</b>		N/A
(14.2)	Type of terminal.....:		—
	Rated current (A) .....		—
(14.3.2.1)	One or more conductors		N/A
(14.3.2.2)	Special preparation		N/A
(14.3.2.3)	Terminal size		N/A
	Cross-sectional area (mm <sup>2</sup> ).....:		—
(14.3.3)	Conductor space (mm).....:		N/A
(14.4)	Mechanical tests		N/A
(14.4.1)	Minimum distance		N/A
(14.4.2)	Cannot slip out		N/A
(14.4.3)	Special preparation		N/A
(14.4.4)	Nominal diameter of thread (metric ISO thread) .....	M	N/A
	External wiring		N/A
	No soft metal		N/A
(14.4.5)	Corrosion		N/A
(14.4.6)	Nominal diameter of thread (mm).....:		N/A
	Torque (Nm).....:		N/A
(14.4.7)	Between metal surfaces		N/A
	Lug terminal		N/A
	Mantle terminal		N/A
	Pull test; pull (N) .....		N/A
(14.4.8)	Without undue damage		N/A

IEC 60598-2-1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>ANNEX 4</b>	<b>Screwless terminals (part of the luminaire)</b>		N/A
<b>(15)</b>	<b>SCREWLESS TERMINALS</b>		N/A
(15.2)	Type of terminal.....:		—
	Rated current (A) .....		—
(15.3.1)	Material		N/A
(15.3.2)	Clamping		N/A
(15.3.3)	Stop		N/A
(15.3.4)	Unprepared conductors		N/A
(15.3.5)	Pressure on insulating material		N/A
(15.3.6)	Clear connection method		N/A
(15.3.7)	Clamping independently		N/A
(15.3.8)	Fixed in position		N/A
(15.3.10)	Conductor size		N/A
	Type of conductor		N/A
(15.5)	Terminals and connections for internal wiring		N/A
(15.5.1)	Mechanical tests		N/A
(15.5.1.1.1)	Pull test spring-type terminals (4 N, 4 samples).....:		N/A
(15.5.1.1.2)	Pull test pin or tab terminals (4 N, 4 samples).....:		N/A
	Insertion force not exceeding 50 N		N/A
(15.5.1.2)	Permanent connections: pull-off test (20 N)		N/A
(15.5.2)	Electrical tests		N/A
	Voltage drop (mV) after 1 h (4 samples) .....		N/A
	Voltage drop of two inseparable joints		N/A
	Number of cycles:		—
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:		N/A
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N/A
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:		N/A
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N/A
(15.6)	Terminals and connections for external wiring		N/A
(15.6.1)	Conductors		N/A
	Terminal size and rating		N/A

IEC 60598-2-1											
Clause	Requirement + Test									Result - Remark	Verdict
15.6.2	Mechanical tests										N/A
(15.6.2.1)	Pull test spring-type terminals or welded connections (4 samples); pull (N) .....										N/A
(15.6.2.2)	Pull test pin or tab terminals (4 samples); pull (N) .....										N/A
(15.6.3)	Electrical tests										N/A
	Tests according 15.6.3.1 + 15.6.3.2 in IEC 60598-1										N/A
<b>(15.6.3.1)</b> <b>(15.6.3.2)</b>	<b>TABLE: Contact resistance test / Heating tests</b>										N/A
	Voltage drop (mV) after 1 h										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)	--	--	--	--	--	--	--	--	--	--	
	Voltage drop of two inseparable joints										N/A
	Voltage drop after 10th alt. 25th cycle										N/A
	Max. allowed voltage drop (mV).....:										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)	--	--	--	--	--	--	--	--	--	--	
	Voltage drop after 50th alt. 100th cycle										N/A
	Max. allowed voltage drop (mV).....:										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)	--	--	--	--	--	--	--	--	--	--	
	Continued ageing: voltage drop after 10th alt. 25th cycle										N/A
	Max. allowed voltage drop (mV).....:										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)	--	--	--	--	--	--	--	--	--	--	
	Continued ageing: voltage drop after 50th alt. 100th cycle										N/A
	Max. allowed voltage drop (mV).....:										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)	--	--	--	--	--	--	--	--	--	--	
Supplementary information: --											





Test Report issued under the responsibility of:



<b>TEST REPORT IEC 62031 LED modules for general lighting – Safety specifications</b>	
<b>Report Number.....</b>	Attachment 1 of CN231UCS 001
<b>Date of issue.....</b>	See main report of IEC 60598-2-1
<b>Total number of pages.....</b>	22 pages
<b>Name of Testing Laboratory preparing the Report .....</b>	TÜV Rheinland (Shenzhen) Co., Ltd.
<b>Applicant's name.....</b>	See main report of IEC 60598-2-1
<b>Address.....</b>	See main report of IEC 60598-2-1
<b>Test specification:</b>	
<b>Standard.....</b>	IEC 62031:2018
<b>Test procedure.....</b>	CB Scheme
<b>Non-standard test method .....</b>	N/A
<b>Test Report Form No. ....</b>	IEC62031F
<b>Test Report Form(s) Originator....</b>	Intertek Semko AB
<b>Master TRF .....</b>	2018-06-14
<b>Copyright © 2018 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.</b>	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.	
<b>This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.</b>	
<b>General disclaimer:</b>	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.	

<b>Test item description..... :</b>	Built-in module	
<b>Trade Mark..... :</b>	See main report of IEC 60598-2-1	
<b>Manufacturer..... :</b>	See main report of IEC 60598-2-1	
<b>Model/Type reference..... :</b>	See main report of IEC 60598-2-1	
<b>Ratings..... :</b>	See main report of IEC 60598-2-1	
<b>Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):</b>		
<input checked="" type="checkbox"/>	<b>CB Testing Laboratory:</b>	TÜV Rheinland (Shenzhen) Co., Ltd.
	<b>Testing location/ address .....</b>	1601-1604, 17-18F, Tower A Building 2, Shenzhen International Innovation Valley, Dashi 1st Road, Xili Street, Xili Community, Nanshan District, Shenzhen 518052, China
	<b>Tested by (name, function, signature)..... :</b>	See main report of IEC 60598-2-1
	<b>Approved by (name, function, signature) :</b>	See main report of IEC 60598-2-1
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 1:</b>	N/A
	<b>Testing location/ address .....</b>	N/A
	<b>Tested by (name, function, signature)..... :</b>	N/A
	<b>Approved by (name, function, signature) :</b>	N/A
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 2:</b>	N/A
	<b>Testing location/ address .....</b>	N/A
	<b>Tested by (name + signature) .....</b>	N/A
	<b>Witnessed by (name, function, signature):</b>	N/A
	<b>Approved by (name, function, signature) :</b>	N/A
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 3:</b>	N/A
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 4:</b>	N/A
	<b>Testing location/ address .....</b>	N/A
	<b>Tested by (name, function, signature)..... :</b>	N/A
	<b>Witnessed by (name, function, signature):</b>	N/A
	<b>Approved by (name, function, signature) :</b>	N/A
	<b>Supervised by (name, function, signature):</b>	N/A

<b>List of Attachments (including a total number of pages in each attachment):</b>																	
N/A																	
<b>Summary of testing:</b>																	
<b>Tests performed (name of test and test clause):</b>	<b>Testing location:</b>																
<table border="1"> <thead> <tr> <th>Clauses</th> <th>Test</th> </tr> </thead> <tbody> <tr> <td colspan="2">IEC 62031:2018</td> </tr> <tr> <td>6</td> <td>Marking</td> </tr> <tr> <td>10 (11)</td> <td>Moisture resistance and insulation</td> </tr> <tr> <td>11 (12)</td> <td>Electric strength</td> </tr> <tr> <td>12 (14)</td> <td>Fault conditions</td> </tr> <tr> <td>15 (16)</td> <td>CREEPAGE DISTANCES AND CLEARANCES</td> </tr> <tr> <td>22</td> <td>Photobiological safety</td> </tr> </tbody> </table>	Clauses	Test	IEC 62031:2018		6	Marking	10 (11)	Moisture resistance and insulation	11 (12)	Electric strength	12 (14)	Fault conditions	15 (16)	CREEPAGE DISTANCES AND CLEARANCES	22	Photobiological safety	TÜV Rheinland (Shenzhen) Co., Ltd. 1601-1604, 17-18F, Tower A Building 2, Shenzhen International Innovation Valley, Dashi 1st Road, Xili Street, Xili Community, Nanshan District, Shenzhen 518052, China
Clauses	Test																
IEC 62031:2018																	
6	Marking																
10 (11)	Moisture resistance and insulation																
11 (12)	Electric strength																
12 (14)	Fault conditions																
15 (16)	CREEPAGE DISTANCES AND CLEARANCES																
22	Photobiological safety																
<b>Summary of compliance with National Differences:</b>																	
<b>List of countries addressed</b>																	
N/A																	

**Copy of marking plate:**

**The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.**

Label for LED module:

3030 8S 18P MIC Optoelectronic Co.,Ltd
---

Note:

1. Other models are same as above, except model name.

<b>Test item particulars</b> .....: See main report of IEC 60598-2-1	
<b>Classification of installation and use</b> .....: See main report of IEC 60598-2-1	
<b>Supply Connection</b> .....: Input wire .....:	
<b>Possible test case verdicts:</b> - test case does not apply to the test object..... : N/A - test object does meet the requirement..... : P (Pass) - test object does not meet the requirement..... : F (Fail)	
<b>Testing</b> ..... :	
<b>Date of receipt of test item</b> ..... : See main report of IEC 60598-2-1	
<b>Date (s) of performance of tests</b> ..... : See main report of IEC 60598-2-1	
<b>General remarks:</b>	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.	
Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.	
Clause numbers between brackets refer to clauses in IEC 61347-1	
<b>Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60598-2-1:</b>	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....:	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
<b>When differences exist; they shall be identified in the General product information section.</b>	
<b>Name and address of factory (ies)</b> .....: See main report of IEC 60598-2-1	
<b>General product information:</b> Built-in module  For details see main report.	

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
<b>4</b>	<b>GENERAL REQUIREMENTS</b>		<b>P</b>
4.2	Classification		<b>P</b>
	Built-in module .....	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	Independent module.....	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Integral module .....	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
4.6	Independent modules comply with requirements in IEC 60598-1:2014/AMD1:2017		N/A
4.8	Modules with integrated controlgear providing SELV comply with requirements according to IEC 61347-1:2015/AMD1:2017 clause L.5 to L.11.	(see Annex 1)	N/A
<b>6</b>	<b>MARKING</b>		<b>P</b>
<b>6.2</b>	<b>Contents of marking for built-in and for independent LED modules</b>		<b>P</b>
	a) mark of origin		P
	b) model number, type reference		P
	c1) constant voltage module; rated supply voltage and supply frequency		N/A
	c2) constant current module; rated supply current and supply frequency		N/A
	d) rated power		N/A
	e) indication of connections, wiring diagram		N/A
	f) value of $t_c$ and place on the module		N/A
	g) $E_{thr}$ if required		N/A
	h) symbol for built-in modules		N/A
	i) heat transfer temperature $t_d$		N/A
	j) power for heat-conduction $P_d$		N/A
	k) working voltage for insulation		N/A
<b>6.3</b>	<b>Location of marking for built-in LED modules</b>		<b>P</b>
	- marking of a) and b) in 6.2 on the modules		P
	- marking of other applicable items in 6.2 on the modules or in data sheet, leaflet or website		P
<b>6.4</b>	<b>Location of marking for independent LED modules</b>		<b>N/A</b>
	- marking of a), b), c) and f) in 6.2 on the modules		N/A
	- marking of other applicable items in 6.2 on the modules or in data sheet, leaflet or website		N/A
<b>6.5</b>	<b>Marking of integral LED modules</b>		<b>N/A</b>

<b>IEC 62031</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	- information in 6.2 a) to g) in data sheet, leaflet or website		N/A
<b>6.6</b>	<b>Durable and legibility of marking</b>		<b>P</b>
	- marking on the LED module legible after test with water		P
	- marking not on the LED module legible		P
<b>7</b>	<b>TERMINALS</b>		<b>N/A</b>
<b>7.1</b>	<b>Integral terminals</b>		<b>N/A</b>
	Screw terminals comply with section 14 of IEC 60598-1	(see Annex 3)	N/A
	Screwless terminals comply with section 15 of IEC 60598-1	(see Annex 4)	N/A
<b>7.2</b>	<b>Terminals other than integral terminals</b>		<b>N/A</b>
	Separately approved; component list	(see Annex 2)	N/A
	Ratings suit the conditions		N/A
	Satisfy additional relevant requirements of this standard		N/A
<b>8 (9)</b>	<b>EARTHING</b>		<b>N/A</b>
<b>- (9.1)</b>	<b>Provisions for protective earthing</b>		<b>N/A</b>
	Terminal complying with clause 8		N/A
	Locked against loosening and not possible to loosen by hand		N/A
	Not possible to loosen clamping means unintentionally on screwless terminals		N/A
	Earthing via means of fixing		N/A
	Earthing terminal only used for the earthing of the control gear		N/A
	All parts of material minimizing the danger of electrolytic corrosion		N/A
	Made of brass or equivalent material		N/A
	Contact surface bare metal		N/A
	Test according 7.2.3 of IEC 60598-1		N/A
<b>- (9.2)</b>	<b>Provision for functional earthing</b>		<b>N/A</b>
	Comply with clause 8 and 9.1		N/A
	Functional earth insulated from live parts by double or reinforced insulation		N/A

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
- (9.3)	<b>Lamp controlgear with conductors for protective earthing by tracks on printed circuit board</b>		<b>N/A</b>
	Test with a current of 25 A between earthing terminal and each of the accessible metal parts; measured resistance ( $\Omega$ ) at $\geq 10$ A according 7.2.3 of IEC 60598-1: $< 0,5 \Omega$ .....		N/A
- (9.4)	<b>Earthing of built-in lamp controlgear</b>		<b>N/A</b>
	Earth by means of fixing to earthed metal of luminaire in compliance of 7.2 of IEC 60598-1		N/A
	Earthing terminal only for earthing the built-in controlgear		N/A
- (9.5)	<b>Earthing via independent controlgear</b>		<b>N/A</b>
- (9.5.1)	Earth connection to other equipment		N/A
	Looping or through connection, conductor min. 1,5 mm <sup>2</sup> and of copper or equivalent		N/A
	Protective earthing wires in line with 5.3.1.1 and clause 7		N/A
- (9.5.2)	Earthing of the lamp compartments powered via the independent lamp controlgear		N/A
	Test with a current of 25 A between input and output earth terminals; measured resistance ( $\Omega$ ) between earthing terminal and each of the accessible metal parts at $\geq 10$ A according 7.2.3 of IEC 60598-1: $< 0,5 \Omega$ .....		N/A
	Output earthing terminal marked as in 7.1 t) of IEC 61347-1		N/A
<b>9 (10)</b>	<b>PROTECTION AGAINST ACCIDENTAL CONTACT WITH LIVE PARTS</b>		<b>N/A</b>
- (10.1)	Controlgear protected against accidental contact with live parts		N/A
- (A2)	Voltage measured with 50 k $\Omega$	(see Annex A)	N/A
- (A3)	Voltage $> 35$ V peak or $> 60$ V d.c. or protective impedance device	(see Annex A)	N/A
- (10.1)	Lacquer or enamel not used for protection or insulation		N/A
	Adequate mechanical strength on parts providing protection		N/A
- (10.2)	Capacitors $> 0,5 \mu\text{F}$ : voltage after 1 min (V): $< 50$ V .....		N/A
- (10.3)	Controlgear providing SELV		N/A



IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
	Accessible conductive parts are insulated from live parts by double or reinforced insulation in SELV controlgear		N/A
	No connection between output circuit and the body or protective earthing circuit		N/A
	No possibility of connection between output circuit and the body or protective earthing circuit through other conductive parts		N/A
	SELV outputs separated from earth by at least basic insulation		N/A
	ELV conductive parts insulated as live parts		N/A
	Tests according Annex L of IEC 61347-1		N/A
- (10.4)	Accessible conductive parts in SELV circuits		N/A
	Output voltage under load $\leq 25$ V r.m.s. or $\leq 60$ V d.c.		N/A
	If output voltage $> 25$ V r.m.s. or $> 60$ V d.c.; No load output $\leq 35$ V peak or $\leq 60$ V d.c and touch current does not exceed 0,7 mA (peak) or 2mA d.c. .... :		N/A
	One conductive part is insulated if output voltage or current exceeding the values above and withstand test voltage 500 V		N/A
	Double or reinforced insulation bridged by appropriate and at least two resistors or two Y2 capacitors or one Y1 capacitor		N/A
	Y1 or Y2 capacitors comply with IEC 60384-14		N/A
	Resistors comply with test (a) in 14.1 of IEC 60065		N/A
<b>10 (11)</b>	<b>MOISTURE RESISTANCE AND INSULATION</b>		<b>P</b>
	After storage 48 h at 91-95% relative humidity and 20-30 °C measuring of insulation resistance with d.c. 500 V (M $\Omega$ ):		P
	For basic insulation $\geq 2$ M $\Omega$ .....	Min.100 M $\Omega$ >1 M $\Omega$	P
	For double or reinforced insulation $\geq 4$ M $\Omega$ .....		N/A
	Between primary and secondary circuits in controlgear providing SELV, values in Annex L in IEC 61347-1		N/A
<b>11 (12)</b>	<b>ELECTRIC STRENGTH</b>		<b>P</b>
	Immediately after clause 11 electric strength test for 1 min		P
	Basic insulation for SELV, test voltage 500 V		P

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
	Working voltage $\leq 50$ V, test voltage 500 V		N/A
	Working voltage $> 50$ V $\leq 1000$ V, test voltage (V):		N/A
	Basic insulation, $2U + 1000$ V		N/A
	Supplementary insulation, $2U + 1000$ V		N/A
	Double or reinforced insulation, $4U + 2000$ V		N/A
	No flashover or breakdown		P
	Solid or thin sheet insulation for double or reinforced insulation fulfil the requirements in Annex N in IEC 61347-1		N/A
<b>12 (14)</b>	<b>FAULT CONDITIONS</b>		<b>P</b>
- (14.1)	When operated under fault conditions the controlgear:		P
	- does not emit flames or molten material		P
	- does not produce flammable gases		P
	- protection against accidental contact not impaired		P
	Thermally protected controlgear does not exceed the marked temperature value		N/A
	Fault conditions: capacitors, resistors or inductors without proof of compliance with relevant specifications have been short-circuited or disconnected	(see appended table)	N/A
- (14.2)	Short-circuit of creepage distances and clearances if less than specified in clause 16 in Part 1 (after any reduction in 14.2 - 14.5)	(see appended table)	N/A
- (14.3)	Short-circuit or interruption of semiconductor devices	(see appended table)	P
- (14.4)	Short-circuit across insulation consisting of lacquer, enamel or textile	(see appended table)	N/A
- (14.5)	Short-circuit across electrolytic capacitors	(see appended table)	N/A
	Short-circuit or interruption of SPDs	(see appended table)	N/A
- (14.6)	After the tests has been carried out on three samples:		P
	The insulation resistance $\geq 1$ M $\Omega$ .....	Min.100 M $\Omega$ >1 M $\Omega$	P
	No flammable gases		P
	No accessible parts have become live		P
	During the tests, a five-layer tissue paper, where the test specimen is wrapped, does not ignite		P
- (14.7)	Relevant fault condition tests with high-power a.c. supply and in turn to a d.c. supply		—
<b>12.2</b>	<b>Overpower condition</b>		<b>P</b>

<b>IEC 62031</b>			
<b>Clause</b>	<b>Requirement + Test</b>	<b>Result - Remark</b>	<b>Verdict</b>
	Module withstands overpower condition >15 min.		P
	Module with automatic protective device or power limiter, test performed 15 min. at limit.		N/A
	No fire, smoke or flammable gas is produced		P
	Molten material does not ignite tissue paper, spread below the module		P
<b>14 (15)</b>	<b>CONSTRUCTION</b>		<b>P</b>
<b>- (15.1)</b>	<b>Wood, cotton, silk, paper and similar fibrous material</b>		<b>P</b>
	Wood, cotton, silk, paper and similar fibrous material not used as insulation		P
<b>- (15.2)</b>	<b>Printed circuits</b>		<b>P</b>
	Printed circuits used as internal connections complies with clause 14		P
<b>15 (16)</b>	<b>CREEPAGE DISTANCES AND CLEARANCES</b>		<b>N/A</b>
<b>- (16.1)</b>	<b>General</b>		<b>N/A</b>
	Creepage distances and clearances according to 16.2 and 16.3		N/A
	Controlgears providing SELV comply with additional requirements in Annex L		N/A
	Insulating lining of metallic enclosures		N/A
	Controlgear protected against pollution comply with Annex P		N/A
<b>- (16.2)</b>	<b>Creepage distances</b>		<b>N/A</b>
<b>- (16.2.2)</b>	<b>Minimum creepage distances for working voltages</b>		<b>N/A</b>
	Creepage distances according to Table 7	(see appended table)	N/A
<b>- (16.2.3)</b>	<b>Creepage distances for working voltages with frequencies above 30 kHz</b>		<b>N/A</b>
	Creepage distances according to Table 8	(see appended table)	N/A
<b>- (16.3)</b>	<b>Clearances</b>		<b>N/A</b>
<b>- (16.3.2)</b>	<b>Clearances for working voltages</b>		<b>N/A</b>
	Clearances distances according to Table 9	(see appended table)	N/A
<b>- (16.3.3)</b>	<b>Clearances for ignition voltages and working voltages with higher frequencies</b>		<b>N/A</b>
	Clearances distances for basic or supplementary insulation according to Table 10		N/A
	Clearances distances for reinforced insulation according to Table 11		N/A

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
<b>16 (17)</b>	<b>SCREWS, CURRENT-CARRYING PARTS AND CONNECTIONS</b>		<b>P</b>
	Screws, current-carrying parts and connections in compliance with IEC 60598-1 (clause numbers between parentheses refer to IEC 60598-1)		—
<b>(4.11)</b>	<b>Electrical connections</b>		<b>P</b>
(4.11.1)	Contact pressure		N/A
(4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
(4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
(4.11.4)	Material of current-carrying parts		P
(4.11.5)	No contact to wood or mounting surface		P
(4.11.6)	Electro-mechanical contact systems		N/A
<b>(4.12)</b>	<b>Mechanical connections and glands</b>		<b>N/A</b>
(4.12.1)	Screws not made of soft metal		N/A
	Screws of insulating material		N/A
	Torque test: torque (Nm); part.....:		N/A
	Torque test: torque (Nm); part.....:		N/A
	Torque test: torque (Nm); part.....:		N/A
(4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
(4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm).....:		N/A
	- lampholder; torque (Nm).....:		N/A
	- push-button switches; torque 0,8 Nm.....:		N/A
(4.12.5)	Screwed glands; force (Nm).....:		N/A
<b>17 (18)</b>	<b>RESISTANCE TO HEAT, FIRE AND TRACKING</b>		<b>N/A</b>
- (18.1)	Ball-pressure test .....	See Test Table 17 (18.1)	N/A
- (18.2)	Test of printed boards .....	See Test Table 17 (18.2)	N/A
- (18.3)	Glow-wire test (650°C) .....	See Test Table 17 (18.3)	N/A
- (18.4)	Needle-flame test (10 s) .....	See Test Table 17 (18.4)	N/A
- (18.5)	Proof tracking test .....	See Test Table 17 (18.5)	N/A

<b>IEC 62031</b>			
Clause	Requirement + Test	Result - Remark	Verdict
<b>18</b>	<b>RESISTANCE TO CORROSION</b>		<b>N/A</b>
	Comply with requirements according 4.18 of IEC 60598-1		N/A
<b>20</b>	<b>HEAT MANAGEMENT</b>		<b>N/A</b>
<b>20.1</b>	<b>General</b>		<b>N/A</b>
	Fulfil clause 20 if replaceable LED module and when heat conducting thermal interface is needed.		N/A
<b>20.2</b>	<b>Thermal interface material</b>		<b>N/A</b>
	Thermal interface material delivered with the module if necessary		N/A
<b>20.3</b>	<b>Heat protection</b>		<b>N/A</b>
	Not impair safety when operated under poor heat-conduction conditions according Annex D		N/A
<b>22</b>	<b>PHOTOBIOLOGICAL SAFETY</b>		<b>P</b>
<b>22.1</b>	<b>UV radiation</b>		<b>N/A</b>
	Luminous radiation not exceed 2mW/klm		N/A
<b>22.2</b>	<b>Blue light hazard</b>		<b>P</b>
	Assessed according to IEC TR 62778	RG1 unlimited	P
<b>22.3</b>	<b>Infrared radiation</b>		<b>N/A</b>
	Requirements for infrared radiation when required		N/A
<b>A</b>	<b>ANNEX A - TESTS</b>		<b>N/A</b>
	All tests performed in accordance with the advice given in Annex H of IEC 61347-1, if applicable		N/A
<b>12 (14)</b>	<b>TABLE: tests of fault conditions</b>		<b>P</b>
<b>Part</b>	<b>Simulated fault</b>		<b>Hazard</b>
LED	SC, unit normal operation, no flames, no gases, recoverable		No

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict

15 (16)	TABLE: clearance and creepage distance measurements (mm)(See main report of IEC 60598-2-1)						N/A
Applicable part of IEC 61347-1 Table 7 – 11*							
Distances	Insulation type **	Measured clearance	Required		Measured creepage	Required	
			clearance	*Table		creepage	*Table
Distance 1:	B	--	--	11.1.B	--	--	11.1.A
Working voltage (V)..... :					--	---	
Frequency if applicable (kHz)..... :					--	---	
PTI ..... :					< 600 <input type="checkbox"/>	≥ 600 <input type="checkbox"/>	
Peak value of the working voltage $\hat{U}_{out}$ if applicable (kV) ..... :					--	---	
Pulse voltage if applicable (kV) ..... :					--	---	
Supplementary information:							

\*\* Insulation type: B – Basic; S – Supplementary; R – Reinforced

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict

17 (18.1)	TABLE: Ball Pressure Test of Thermoplastics			N/A
Allowed impression diameter (mm) .....		2	—	
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
--	--	--	--	
Supplementary information:				

17 (18.2)	TABLE: Test of printed boards				N/A
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (s)	Ignition of specified layer Yes/No	Duration of burning (s)	Verdict
--	--	--	--	--	--
Supplementary information:					

17 (18.3)	TABLE: Glow-wire test					N/A
Glow wire temperature .....		650°C			—	
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict	
--	--	--	--	--	--	
Any flame or glowing of the sample extinguished within 30 s of withdrawing the glow-wire, and any burning or molten drop did not ignite the underlying parts (Yes/No).....:					--	
Supplementary information:						

17 (18.4)	TABLE: Needle-flame test				N/A
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
--	--	--	--	--	--
Supplementary information:					

17 (18.5)	TABLE: Proof tracking test		N/A
Test voltage PTI .....		175 V	—

IEC 62031					
Clause	Requirement + Test			Result - Remark	Verdict
Object/ Part No./ Material	Manufacturer/ trademark	Withstand 50 drops without failure on three places or on three specimens			Verdict
--	--	--	--	--	--
Supplementary information:					



IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
<b>(A)</b>	<b>ANNEX A - TEST TO ESTABLISH WHETHER A CONDUCTIVE PART IS A LIVE PART WHICH MAY CAUSE AN ELECTRIC SHOCK</b>		<b>N/A</b>
(A.1)	Comply with A.2 or A.3		N/A
<b>ANNEX 1</b>	<b>LED MODULES WITH INTEGRAL CONTROLGEAR PROVIDING SELV</b>		<b>N/A</b>
<b>(L.5)</b>	<b>Protection against electric shock</b>		<b>N/A</b>
	Comply with 9.2 of IEC 61558-1		N/A
<b>(L.6)</b>	<b>Heating</b>		<b>N/A</b>
	No excessive temperatures in normal use		N/A
	Value if capacitor tc marked .....		—
	Winding insulation classified as Class .....		—
	Comply with tests of clause 14 of IEC 61558-1 with adjustments		N/A
<b>(L.7)</b>	<b>Short-circuit and overload protection</b>		<b>N/A</b>
	Comply with tests of clause 15 of IEC 61558-1 with adjustments		N/A
<b>(L.8)</b>	<b>Insulation resistance and electric strength</b>		<b>N/A</b>
(L.8.1)	Conditioned 48 h between 91 % and 95 %		N/A
(L.8.2)	Insulation resistance		N/A
	Between input- and output circuits not less than 5 MΩ .....		N/A
	Between metal parts of class II convertors which are separated from live parts by basic insulation only and the body not less than 5 MΩ .....		N/A
	Between metal foil in contact with the inner and outer surfaces of enclosures of insulating material not less than 2 MΩ .....		N/A
(L.8.3)	Electric strength		N/A
	1) Between live parts of input circuits and live parts of output circuits .....		N/A
	2) Over basic or supplementary insulation between:		N/A
	a) live parts having different polarity .....		N/A
	b) live parts and body if intended to be connected to protective earth .....		N/A
	c) accessible metal parts and a metal rod of the same diameter as the flexible cable or cord .....		N/A
	d) live parts and an intermediate metal part .....		N/A
	e) intermediate metal parts and the body .....		N/A

<b>IEC 62031</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	f) each input circuit and all other input circuits .....		N/A
	3) Over reinforced insulation between the body and live parts .....		N/A
<b>(L.9)</b>	<b>Construction</b>		N/A
(L.9.1)	Transformer comply with 19.12 of IEC 61558-1 and 19 of IEC 61558-2-6		N/A
	HF transformer comply with 19 of IEC 61558-2-16		N/A
<b>(L.10)</b>	<b>Components</b>		N/A
	Protective devices comply with 20.6 – 20.11 of IEC 61558-1		N/A
<b>(L.11)</b>	<b>Creepage distances, clearances and distances through insulation</b>		N/A
	Creepage distances and clearances not less than in Clause 16		N/A
	Distance through insulation according Table L.5 in IEC 61347-1		N/A
	1) Basic distance through insulation		N/A
	Required distance (mm) .....		—
	Measured (mm) .....		N/A
	Supplementary information		—
	2) Supplementary distance through insulation		N/A
	Required distance (mm) .....		—
	Measured (mm) .....		N/A
	Supplementary information		—
	3) Reinforced distance through insulation		N/A
	Required distance (mm) .....		—
	Measured (mm) .....		N/A
	Supplementary information		—

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict

ANNEX 2		TABLE: Critical components information					
Object / part No.	Code	Manufacturer/ trademark	Type / model	Technical data	Standard	Mark(s) of conformity <sup>1)</sup>	
See main report of IEC 60598-2-1							
Supplementary information:							
<sup>1)</sup> Provided evidence ensures the agreed level of compliance. See OD-CB2039. The codes above have the following meaning: A - The component is replaceable with another one, also certified, with equivalent characteristics B - The component is replaceable if authorised by the test house C - Integrated component tested together with the appliance D - Alternative component							

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict

<b>ANNEX 3</b>	<b>Screw terminals (part of the luminaire)</b>		N/A
<b>(14)</b>	<b>SCREW TERMINALS</b>		N/A
(14.2)	Type of terminal.....:		—
	Rated current (A) .....		—
(14.3.2.1)	One or more conductors		N/A
(14.3.2.2)	Special preparation		N/A
(14.3.2.3)	Terminal size		N/A
	Cross-sectional area (mm <sup>2</sup> ).....:		—
(14.3.3)	Conductor space (mm).....:		N/A
(14.4)	Mechanical tests		N/A
(14.4.1)	Minimum distance		N/A
(14.4.2)	Cannot slip out		N/A
(14.4.3)	Special preparation		N/A
(14.4.4)	Nominal diameter of thread (metric ISO thread) .....	M	N/A
	External wiring		N/A
	No soft metal		N/A
(14.4.5)	Corrosion		N/A
(14.4.6)	Nominal diameter of thread (mm).....:		N/A
	Torque (Nm).....:		N/A
(14.4.7)	Between metal surfaces		N/A
	Lug terminal		N/A
	Mantle terminal		N/A
	Pull test; pull (N) .....		N/A
(14.4.8)	Without undue damage		N/A

IEC 62031			
Clause	Requirement + Test	Result - Remark	Verdict
<b>ANNEX 4</b>	<b>Screwless terminals (part of the luminaire)</b>		N/A
<b>(15)</b>	<b>SCREWLESS TERMINALS</b>		N/A
(15.2)	Type of terminal.....:		—
	Rated current (A) .....		—
(15.3.1)	Material		N/A
(15.3.2)	Clamping		N/A
(15.3.3)	Stop		N/A
(15.3.4)	Unprepared conductors		N/A
(15.3.5)	Pressure on insulating material		N/A
(15.3.6)	Clear connection method		N/A
(15.3.7)	Clamping independently		N/A
(15.3.8)	Fixed in position		N/A
(15.3.10)	Conductor size		N/A
	Type of conductor		N/A
(15.5.1)	Terminals internal wiring		N/A
(15.5.1.1)	Pull test spring-type terminals (4 N, 4 samples).....:		N/A
(15.5.1.2)	Pull test pin or tab terminals (4 N, 4 samples).....:		N/A
	Insertion force not exceeding 50 N		N/A
(15.5.1.2)	Permanent connections: pull-off test (20 N)		N/A
(15.5.2)	Electrical tests		N/A
	Voltage drop (mV) after 1 h (4 samples) .....		N/A
	Voltage drop of two inseparable joints		N/A
	Number of cycles:		—
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:		N/A
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N/A
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:		N/A
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N/A
(15.6)	Terminals and connections for external wiring		N/A
(15.6.1)	Conductors		N/A
	Terminal size and rating		N/A

IEC 62031											
Clause	Requirement + Test									Result - Remark	Verdict
(15.6.2)	Mechanical tests										N/A
(15.6.2.1)	Pull test spring-type terminals or welded connections (4 samples); pull (N) .....										N/A
(15.6.2.2)	Pull test pin or tab terminals (4 samples); pull (N) .....										N/A
(15.6.3)	Electrical tests										N/A
	Tests according 15.6.3.1 + 15.6.3.2 in IEC 60598-1										N/A
<b>(15.6.3.1)</b> <b>(15.6.3.2)</b>	<b>TABLE: Contact resistance test / Heating tests</b>										N/A
	Voltage drop (mV) after 1 h										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)	--	--	--	--	--	--	--	--	--	--	
	Voltage drop of two inseparable joints										N/A
	Voltage drop after 10th alt. 25th cycle										N/A
	Max. allowed voltage drop (mV)..... : --										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)	--	--	--	--	--	--	--	--	--	--	
	Voltage drop after 50th alt. 100th cycle										N/A
	Max. allowed voltage drop (mV)..... : --										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)	--	--	--	--	--	--	--	--	--	--	
	Continued ageing: voltage drop after 10th alt. 25th cycle										N/A
	Max. allowed voltage drop (mV)..... : --										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)	--	--	--	--	--	--	--	--	--	--	
	Continued ageing: voltage drop after 50th alt. 100th cycle										N/A
	Max. allowed voltage drop (mV)..... : --										—
terminal	1	2	3	4	5	6	7	8	9	10	
voltage drop (mV)	--	--	--	--	--	--	--	--	--	--	
Supplementary information:											



Test Report issued under the responsibility of:



<b>TEST REPORT</b> <b>IEC TR 62778</b> <b>Application of IEC 62471 for the assessment of blue light hazard to light sources and luminaires</b>	
<b>Report Number</b> .....	Attachment 2 of CN231UCS 001
<b>Date of issue</b> .....	See main report of IEC 60598-2-1
<b>Total number of pages</b> .....	9 pages
<b>Name of Testing Laboratory preparing the Report</b> .....	TÜV Rheinland (Shenzhen) Co., Ltd.
<b>Applicant's name</b> .....	See main report of IEC 60598-2-1
<b>Address</b> .....	See main report of IEC 60598-2-1
<b>Test specification:</b>	
<b>Standard</b> .....	IEC TR 62778:2014 (Second Edition)
<b>Test procedure</b> .....	CB Scheme
<b>Non-standard test method</b> .....	N/A
<b>Test Report Form No.</b> .....	IEC62778A
<b>Test Report Form(s) Originator</b> ....	TÜV SÜD Product Service GmbH
<b>Master TRF</b> .....	Dated 2016-02
<b>Copyright © 2016 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.</b>	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.	
<b>This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.</b>	
<b>General disclaimer:</b>	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.	

<b>Test item description..... :</b>	Built-in module	
<b>Trade Mark..... :</b>	See main report of IEC 60598-2-1	
<b>Manufacturer..... :</b>	See main report of IEC 60598-2-1	
<b>Model/Type reference..... :</b>	See Attachment 1 of IEC 62031	
<b>Ratings..... :</b>	See Attachment 1 of IEC 62031	
<b>Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):</b>		
<input checked="" type="checkbox"/>	<b>CB Testing Laboratory:</b>	TÜV Rheinland (Shenzhen) Co., Ltd.
	<b>Testing location/ address .....</b>	1601-1604, 17-18F, Tower A Building 2, Shenzhen International Innovation Valley, Dashi 1st Road, Xili Street, Xili Community, Nanshan District, Shenzhen 518052, China
<input type="checkbox"/>	<b>Associated CB Testing Laboratory:</b>	N/A
	<b>Testing location/ address .....</b>	N/A
	<b>Tested by (name, function, signature)..... :</b>	See main report of IEC 60598-2-1
	<b>Approved by (name, function, signature) :</b>	See main report of IEC 60598-2-1
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 1:</b>	N/A
	<b>Testing location/ address .....</b>	N/A
	<b>Tested by (name, function, signature)..... :</b>	N/A
	<b>Approved by (name, function, signature) :</b>	N/A
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 2:</b>	N/A
	<b>Testing location/ address .....</b>	N/A
	<b>Tested by (name + signature) .....</b>	N/A
	<b>Witnessed by (name, function, signature):</b>	N/A
	<b>Approved by (name, function, signature) :</b>	N/A
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 3:</b>	N/A
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 4:</b>	N/A
	<b>Testing location/ address .....</b>	N/A
	<b>Tested by (name, function, signature)..... :</b>	N/A
	<b>Witnessed by (name, function, signature):</b>	N/A
	<b>Approved by (name, function, signature) :</b>	N/A
	<b>Supervised by (name, function, signature):</b>	N/A



<b>List of Attachments (including a total number of pages in each attachment):</b> N/A	
<b>Summary of testing:</b>	
<b>Tests performed (name of test and test clause):</b> N/A	<b>Testing location:</b> TÜV Rheinland (Shenzhen) Co., Ltd. 1601-1604, 17-18F, Tower A Building 2, Shenzhen International Innovation Valley, Dashi 1st Road, Xili Street, Xili Community, Nanshan District, Shenzhen 518052, China
<b>Summary of compliance with National Differences (List of countries addressed):</b> N/A	

**Copy of marking plate:**

**The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.**

N/A

<b>Test item particulars</b> .....	: See main report of IEC 60598-2-1
<b>Product evaluated</b> .....	: <input type="checkbox"/> LED package <input checked="" type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire
<b>Rated voltage (V)</b> .....	: See main report of IEC 60598-2-1
<b>Rated current (mA)</b> .....	: N/A
<b>Rated CCT (K)</b> .....	: 5000K
<b>Rated Luminance (Mcd/m<sup>2</sup>)</b> .....	: N/A
<b>Component report data used</b> .....	: <input checked="" type="checkbox"/> Not applicable <input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp Report number:
<b>Possible test case verdicts:</b>	
- test case does not apply to the test object.....	: N/A
- test object does meet the requirement .....	: P (Pass)
- test object does not meet the requirement.....	: F (Fail)
<b>Testing</b> .....	
<b>Date of receipt of test item</b> .....	: See main report of IEC 60598-2-1
<b>Date (s) of performance of tests</b> .....	: See main report of IEC 60598-2-1
<b>General remarks:</b>	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.	
Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.	
<b>Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60598-2-1:</b>	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
<b>When differences exist; they shall be identified in the General product information section.</b>	
<b>Name and address of factory (ies)</b> .....	: See main report of IEC 60598-2-1

**General product information:**

See main report of IEC 60598-2-1

IEC TR 62778			
Clause	Requirement + Test	Result - Remark	Verdict
<b>7</b>	<b>MEASUREMENT INFORMATION FLOW</b>		<b>P</b>
<b>7.1</b>	<b>Basic flow</b>		<b>P</b>
	'Law of conservation of luminance' applied		P
	Use of only true luminance/radiance values		P
	In case of luminaire: The light source is operated in the luminaire under similar conditions as when tested as a component		N/A
	In case $E_{thr}$ value for RG2 was established the peak value was derived from angular light distribution		N/A
<b>7.2</b>	<b>Conditions for the radiance measurement</b>		<b>P</b>
	Standard condition applied (200mm distance, 0,011rad field of view)		P
	Non-standard condition applied		N/A
<b>7.3</b>	<b>Special cases (I): Replacement by a lamp or LED module of another type</b>		<b>N/A</b>
	Light source is a white light source		N/A
	Evaluation done based on highest luminance		N/A
	Evaluation done based on CCT value		N/A
<b>7.4</b>	<b>Special cases (II): Arrays and clusters of primary light sources</b>		<b>N/A</b>
	LED package is evaluated as ..... : <input type="checkbox"/> RG0 unlimited <input type="checkbox"/> RG1 unlimited		N/A
	$E_{thr}$ of LED package applies to array		N/A
<b>8</b>	<b>RISK GROUP CLASSIFICATION</b>		<b>P</b>
	Risk group achieved:		P
	-..Risk Group 0 unlimited		N/A
	-..Risk Group 1 unlimited		P
	- $E_{thr}$ ..... (lx) : Distance to reach RG1 ..... (m) :		N/A

TABLE: Spectroradiometric measurement				
Measurement performed on:		<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire		
Model number.....		MYL-A150 with CCT 5000K		
Test voltage (V).....		240		
Test current (mA).....		/		
Test frequency (Hz).....		50Hz		
Ambient, t (°C).....		25,0°C		
Measurement distance.....		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		
Source size .....		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small : .... mm		
Field of view .....		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		
Item	Symbol	Units	Result	Remark
Correlated colour temperature	CCT	K	--	--
x/y colour coordinates			--	--
Blue light hazard radiance	L <sub>B</sub>	W/(m <sup>2</sup> •sr <sup>1</sup> )	405	RG1 unlimited
Blue light hazard irradiance	E <sub>B</sub>	W/m <sup>2</sup>	--	--
Luminance	L	cd/m <sup>2</sup>	6,067E+05	--
Illuminance	E	lx	--	--
Supplementary information:				

	<b>TABLE: Angular light distribution</b>	
N/A		



Test Report issued under the responsibility of:



<b>TEST REPORT</b> <b>IEC 62493</b> <b>Assessment of lighting equipment related to human exposure to electromagnetic fields</b>	
<b>Report Number</b> .....	Attachment 3 of CN231UCS 001
<b>Date of issue</b> .....	See main report of IEC 60598-2-1
<b>Total number of pages</b> .....	9 pages
<b>Name of Testing Laboratory preparing the Report</b> .....	TÜV Rheinland (Shenzhen) Co., Ltd.
<b>Applicant's name</b> .....	See main report of IEC 60598-2-1
<b>Address</b> .....	See main report of IEC 60598-2-1
<b>Test specification:</b>	
<b>Standard</b> .....	IEC 62493 (ed.2)
<b>Test procedure</b> .....	CB Scheme
<b>Non-standard test method</b> .....	N/A
<b>Test Report Form No.</b> .....	IEC62493B
<b>Test Report Form(s) Originator</b> ....	Intertek Semko AB
<b>Master TRF</b> .....	2016-04
<b>Copyright © 2016 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.</b>	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.	
<b>This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.</b>	
<b>General disclaimer:</b>	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.	



<b>Test item description</b> ..... :	See main report of IEC 60598-2-1	
<b>Trade Mark</b> ..... :	See main report of IEC 60598-2-1	
<b>Manufacturer</b> ..... :	See main report of IEC 60598-2-1	
<b>Model/Type reference</b> ..... :	See main report of IEC 60598-2-1	
<b>Ratings</b> ..... :	See main report of IEC 60598-2-1	
<b>Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):</b>		
<input checked="" type="checkbox"/>	<b>CB Testing Laboratory:</b>	TÜV Rheinland (Shenzhen) Co., Ltd.
	<b>Testing location/ address</b> .....	1601-1604, 17-18F, Tower A Building 2, Shenzhen International Innovation Valley, Dashi 1st Road, Xili Street, Xili Community, Nanshan District, Shenzhen 518052, China
<input type="checkbox"/>	<b>Associated CB Testing Laboratory:</b>	N/A
	<b>Testing location/ address</b> .....	N/A
	<b>Tested by (name, function, signature)</b> ..... :	See main report of IEC 60598-2-1
	<b>Approved by (name, function, signature)</b> :	See main report of IEC 60598-2-1
<b>Testing procedure: CTF Stage 1:</b>		
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 1:</b>	N/A
	<b>Testing location/ address</b> .....	N/A
	<b>Tested by (name, function, signature)</b> ..... :	N/A
	<b>Approved by (name, function, signature)</b> :	N/A
<b>Testing procedure: CTF Stage 2:</b>		
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 2:</b>	N/A
	<b>Testing location/ address</b> .....	N/A
	<b>Tested by (name + signature)</b> .....	N/A
	<b>Witnessed by (name, function, signature):</b>	N/A
	<b>Approved by (name, function, signature)</b> :	N/A
<b>Testing procedure: CTF Stage 3:</b>		
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 3:</b>	N/A
<input type="checkbox"/>	<b>Testing procedure: CTF Stage 4:</b>	N/A
	<b>Testing location/ address</b> .....	N/A
	<b>Tested by (name, function, signature)</b> ..... :	N/A
	<b>Witnessed by (name, function, signature):</b>	N/A
	<b>Approved by (name, function, signature)</b> :	N/A
	<b>Supervised by (name, function, signature):</b>	N/A

<b>List of Attachments (including a total number of pages in each attachment):</b>  N/A	
<b>Summary of testing:</b>	
<b>Tests performed (name of test and test clause):</b> N/A	<b>Testing location:</b> TÜV Rheinland (Shenzhen) Co., Ltd. 1601-1604, 17-18F, Tower A Building 2, Shenzhen International Innovation Valley, Dashi 1st Road, Xili Street, Xili Community, Nanshan District, Shenzhen 518052, China
<b>Summary of compliance with National Differences (List of countries addressed):</b>  N/A	

**Copy of marking plate:**

**The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.**

N/A

<b>Test item particulars</b> .....: See main report of IEC 60598-2-1	
<b>Classification of installation and use</b> .....: See main report of IEC 60598-2-1	
<b>Supply Connection</b> .....: See main report of IEC 60598-2-1 .....:	
<b>Possible test case verdicts:</b> - test case does not apply to the test object..... : N/A - test object does meet the requirement ..... : P (Pass) - test object does not meet the requirement..... : F (Fail)	
<b>Testing</b> ..... :	
<b>Date of receipt of test item</b> ..... : See main report of IEC 60598-2-1	
<b>Date (s) of performance of tests</b> ..... : See main report of IEC 60598-2-1	
<b>General remarks:</b>	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.	
Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.	
<b>Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60598-2-1:</b>	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....:	<input type="checkbox"/> <b>Yes</b> <input checked="" type="checkbox"/> <b>Not applicable</b>
<b>When differences exist; they shall be identified in the General product information section.</b>	
<b>Name and address of factory (ies)</b> .....: See main report of IEC 60598-2-1	

IEC 62493			
Clause	Requirement + Test	Result - Remark	Verdict

General product information:	
Description of the EUT .....	<input checked="" type="checkbox"/> Luminaire
	<input type="checkbox"/> Self-ballasted lamp
	<input type="checkbox"/> Built-in electronic control gear
	<input checked="" type="checkbox"/> Independent electronic control gear
	<input type="checkbox"/> Others:
Control Gear .....	<input type="checkbox"/> Magnetic control gear / transformer
	<input checked="" type="checkbox"/> Electronic control gear
	<input type="checkbox"/> Others:
Lamp technology used .....	<input type="checkbox"/> Fluorescent lamp
	<input type="checkbox"/> High pressure discharge lamp (HID)
	<input checked="" type="checkbox"/> Light emitting diode (LED)
	<input type="checkbox"/> Tungsten halogen lamp
	<input type="checkbox"/> Incandescent lamp
	<input type="checkbox"/> Others:
Model Number .....	See main report of IEC 60598-2-1
Brand .....	See main report of IEC 60598-2-1
Rated Voltage/Frequency .....	<input checked="" type="checkbox"/> AC: See main report of IEC 60598-2-1
	<input type="checkbox"/> DC:
	<input type="checkbox"/> AC/DC:
Rated Power .....	See main report of IEC 60598-2-1
Protection Class .....	See main report of IEC 60598-2-1
Number of phases .....	See main report of IEC 60598-2-1
Accessories .....	--

IEC 62493			
Clause	Requirement + Test	Result - Remark	Verdict
<b>4</b>	<b>LIMITS</b>		P
<b>4.1</b>	<b>General</b>		P
	Comply with Van der Hoofden test limit in 4.2.3 or inherently compliant in 4.2.2 and pass assessment procedure for intentional radiators in 4.3		P
<b>4.2</b>	<b>Unintentional radiating part of lighting equipment</b>		P
4.2.2	Lighting equipment deemed to comply with the Van der Hoofden test without testing		P
	1) electronic controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	2) incandescent-lamp technology	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	3) LED-light-source technology	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	4) OLED-light-source technology	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	5) high-pressure discharge lamp LED-light-source technologies	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	6) low-pressure discharge lamp technologies with exposure distance $\geq 50$ cm	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	7) independent auxiliary	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Not fulfil any of 1-7 above subject to 4.2.3		—
4.2.3	Applications of limits		N/A
	Not fulfil any of 1-7 in 4.2.2 but the compliance factor $F$ is $\leq 1$		N/A
<b>4.3</b>	<b>Intentional radiating part of lighting equipment</b>		N/A
	Comply with one of methods in Clause 7 if intentional radiator		N/A
<b>5</b>	<b>GENERAL</b>		N/A
<b>5.1</b>	<b>Measurand</b>		N/A
	Test head, measuring instrumentation and measuring conditions according Clause 5.1 – 5.8		N/A
<b>6</b>	<b>MEASUREMENT PROCEDURE FOR THE VAN DER HOOFDEN TEST</b>		N/A
<b>6.1</b>	<b>General</b>		N/A
	Measurements carried out under conditions according Clause 6.1 – 6.6	See Table 6	N/A

IEC 62493			
Clause	Requirement + Test	Result - Remark	Verdict

<b>7</b>	<b>ASSESSMENT PROCEDURE INTENTIONAL RADIATORS</b>		N/A
<b>7.2</b>	<b>Low-power exclusion method</b>		N/A
7.2.1	Input $P_{\text{int,rad}}$ .....		—
	Exclusion level $P_{\text{max}}$ .....		—
	Input power $P_{\text{int,rad}} <$ exclusion level $P_{\text{max}}$		N/A
<b>7.3</b>	<b>Application of the EMF product standard for body worn-equipment</b>		N/A
	If not Clause 7.2 is met and expose distance $\leq 0.05$ m, comply with IEC 62209-2		N/A
<b>7.4</b>	<b>Application of the EMF product standard for base stations</b>		N/A
	If not Clause 7.2 is met and if intentional radiator is base station, comply with IEC 62232		N/A
<b>7.5</b>	<b>Application of another EMF standard</b>		N/A
	If not Clause 7.2 is met and if intentional radiator cannot be considered as in Clause 7.3 or 7.4, comply with IEC 62311		N/A

<b>6</b>	<b>TABLE: Measurement results with Van der Hoofden test head</b>			N/A
Location of EuT	Measuring distance	Result (F)	Limit (F)	Verdict
--	--	--	--	--
--	--	--	--	--
--	--	--	--	--

<b>6</b>	<b>TABLE: Equipment used during test with Van der Hoofden test head</b>		
Equipment	Manufacturer	Type	Id. No.
Van der Hoofden test head	--	--	--
Measurement receiver	--	--	--
--	--	--	--

IEC 62493			
Clause	Requirement + Test	Result - Remark	Verdict

Test set-up, photos			
---------------------	--	--	--



Test for LUM earthing terminal of LED driver according to IEC 61347-1:2015+A1			
Clause	Requirement + Test	Result - Remark	Verdict
<b>9</b>	<b>PROVISION FOR PROTECTIVE EARTHING</b>		<b>P</b>
<b>9.5</b>	<b>Earthing via independent controlgear</b>		<b>P</b>
9.5.1	Earth connection to other equipment		P
	Looping or through connection, conductor min. 1,5 mm <sup>2</sup> and of copper or equivalent		N/A
	Protective earthing wires in line with 5.3.1.1 and clause 7 of IEC 60598-1		P
9.5.2	Earthing of the lamp compartments powered via the independent lamp controlgear		P
	Test with a current of 25 A between input and output earth terminals; measured resistance ( $\Omega$ ) between earthing terminal or earthing contact and each of the accessible metal parts at $\geq 10$ A according 7.2.3 of IEC 60598-1: $< 0,5 \Omega$ .....	For model MYL-A150: 0,01 $\Omega$	P
	Output earthing terminal marked as in 7.1 t) of IEC 61347-1		P

Photo document



Figure 1. Over view of model MYL-A150



Figure 2. Over view of model MYL-A150

Photo document



Figure 3. Gland view for supply cord



Figure 4. Internal view of model MYL-A150

Photo document



Figure 5. Earth view of model MYL-A150

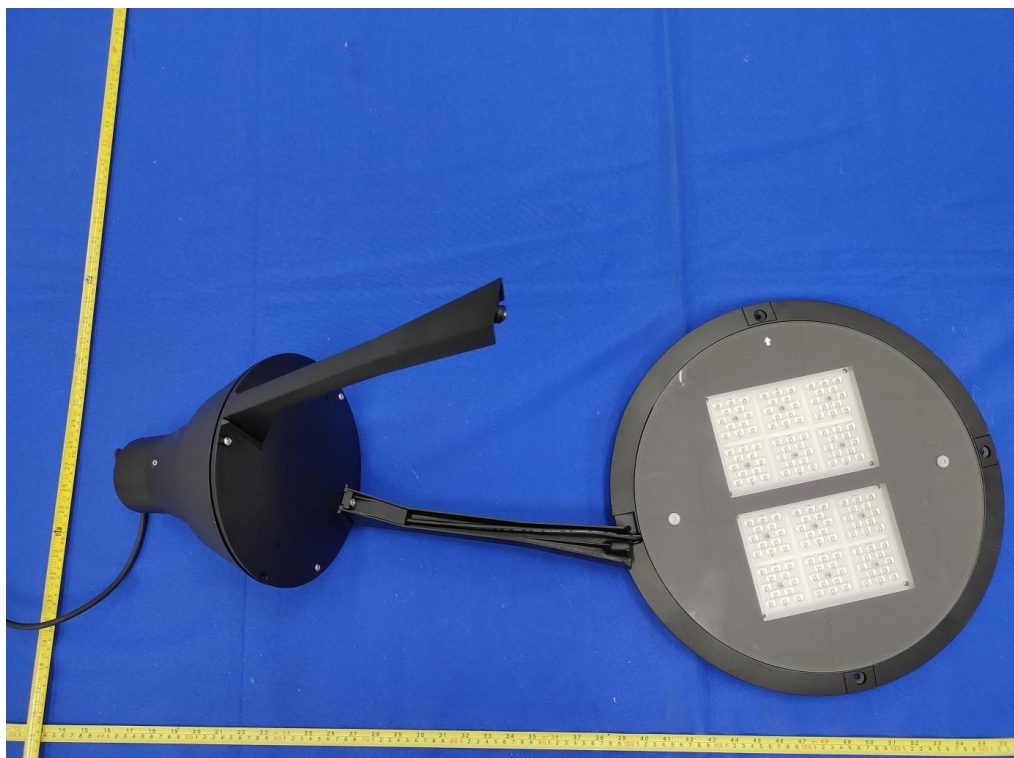


Figure 6. Internal view of model MYL-A150

Photo document

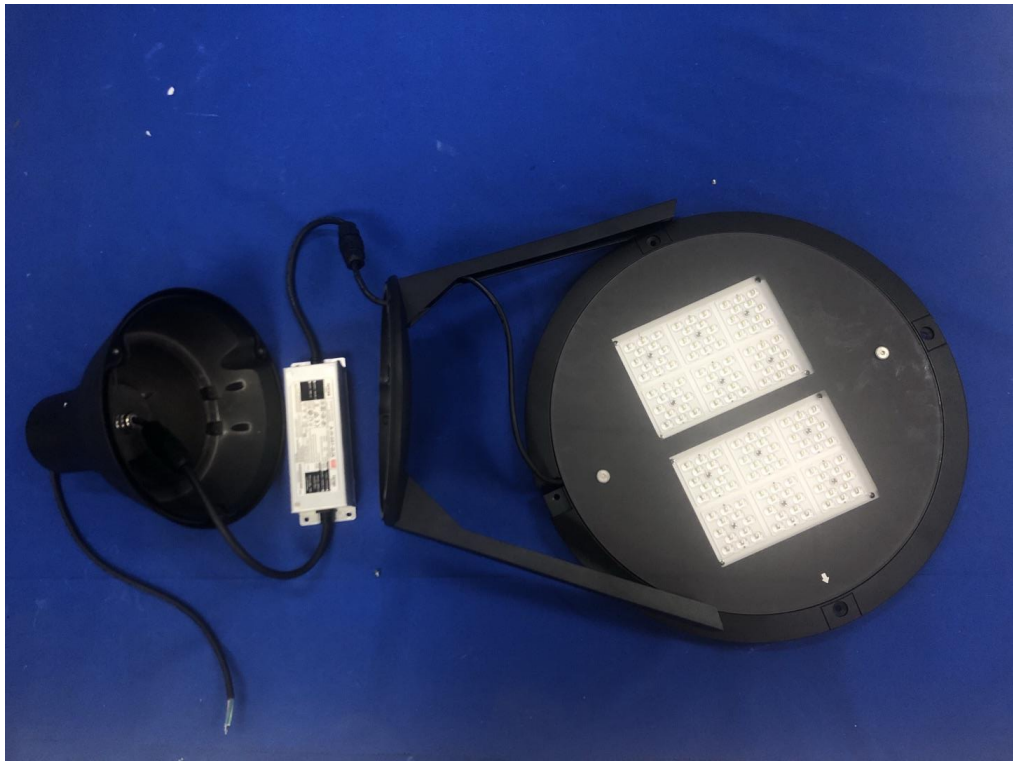


Figure 7. Internal view of model MYL-A150

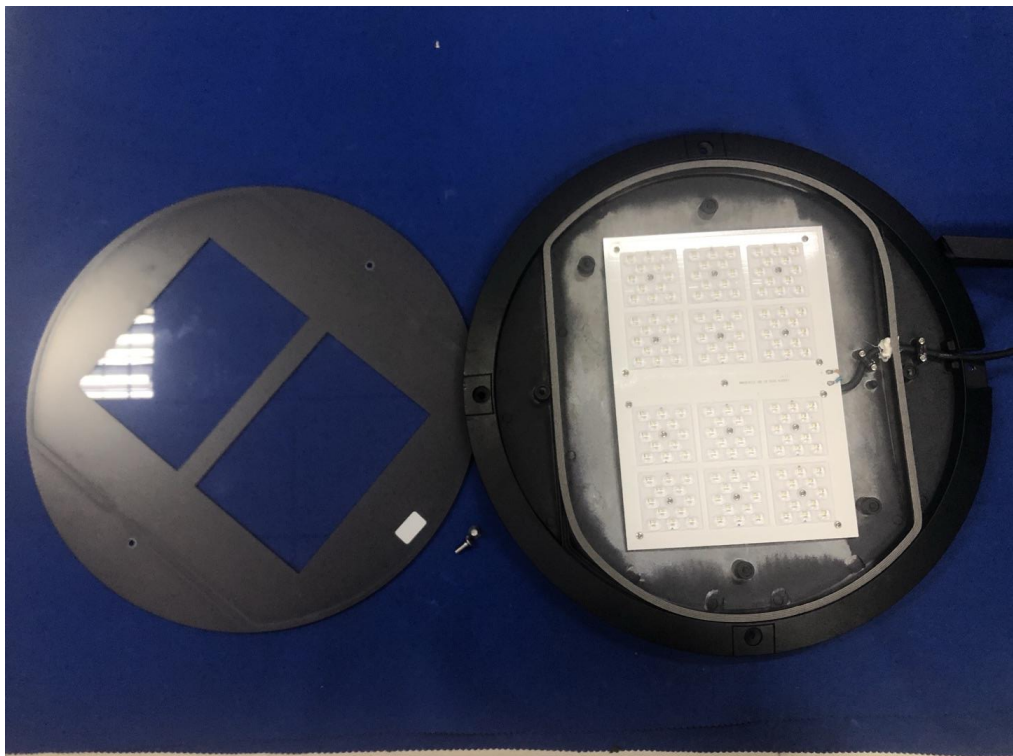


Figure 8. Internal view of model MYL-A150

Photo document

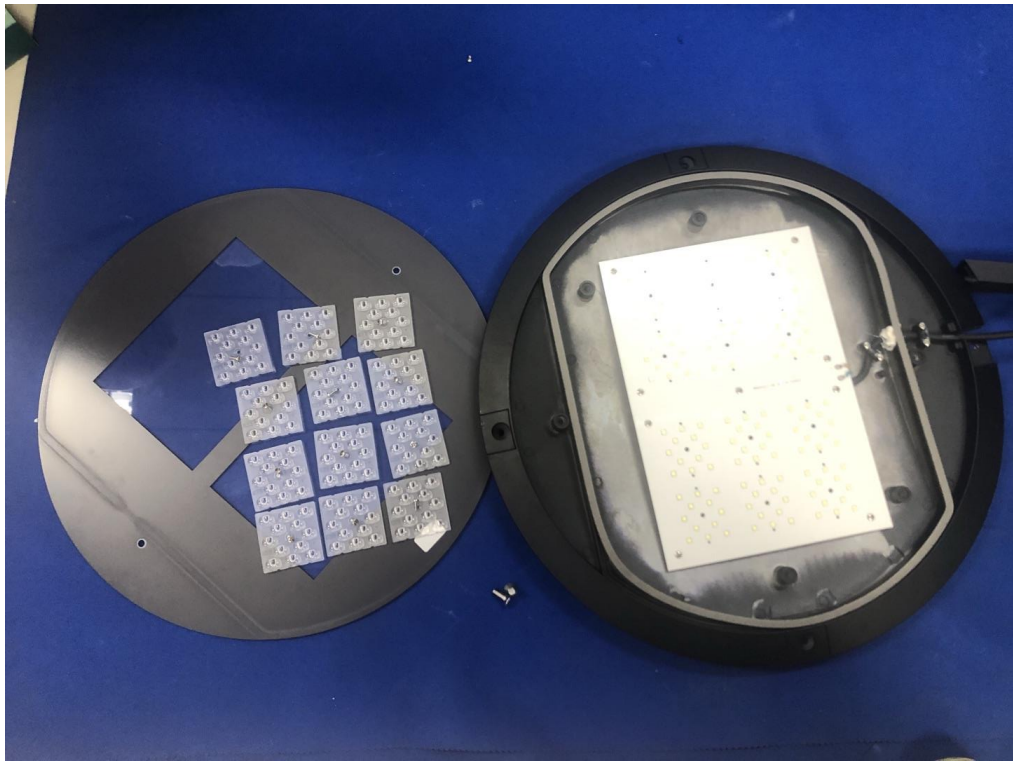


Figure 9. Internal view of model MYL-A150

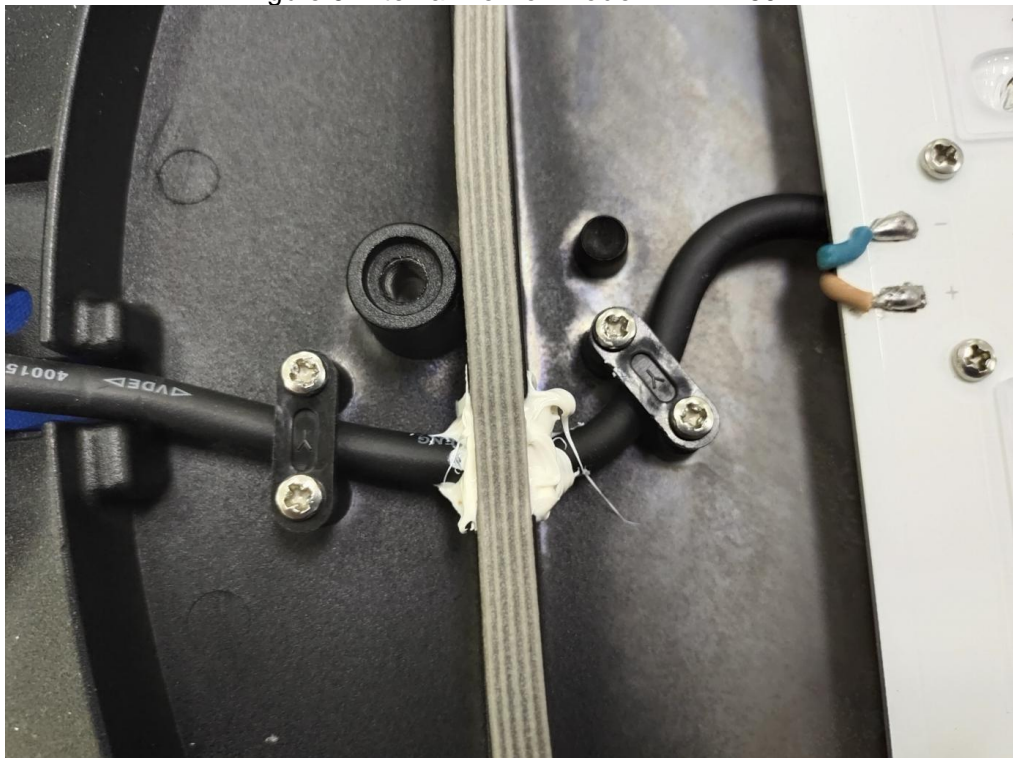


Figure 10. Internal view of model MYL-A150

Photo document

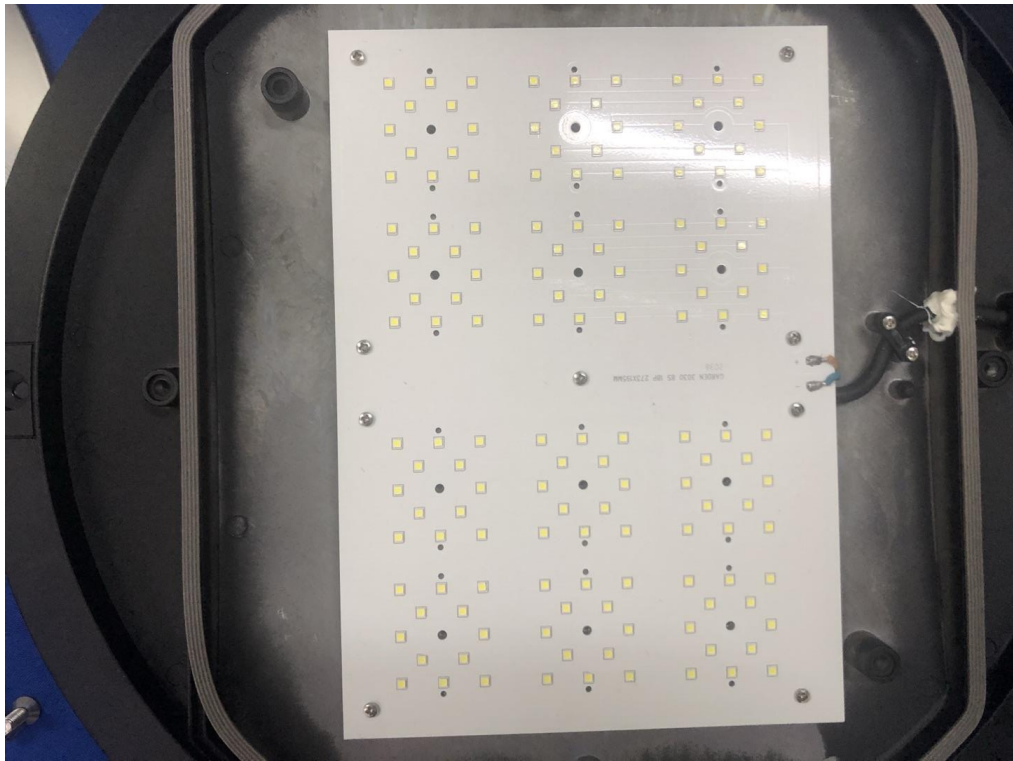


Figure 11. Internal view of sample series 3



Figure 12. LED driver view of model XLG-150-H-A

Photo document



Figure 13. LED driver view of model XLG-100-H-A

- END OF REPORT -