





Electrical Specifications

- **Led Power** 60/80/100w
- **IP Grade** IP66
- **Input Voltage** AC100-270V
- **Operating Temperature** -40°C to +55°C
- **Driver** 3 gear adjustment
- **Power Factor (PF)** >0.95
- **Protection class IK** IK08
- **Certification** CE,ROHS,TUV,ETL


Photometric & Packing Specifications

- | | | | |
|---------------------------|-------------------------|-----------------------|--|
| • Led Lamp | SMD 2835 OSRAM | • Guarantee | 5 years  |
| • Lumen Output | 9000/12000/15000LM | • CCT | 2700k~6500k |
| • Light Efficiency | 150lm/w | • UGR | <19 |
| • Photometric Type | 60°, 90°, 120° | • Material | Die-casting Aluminum+PC cover |
| • Life span | >50000 hours | • GW/CBM | 1.7kg/2.1kg |
| • CRI | >80 | • Product size | Dia300*82mm |
| • Mounting type | Hook suspending mounted | • Carton size | L335*W330*H125mm, 1pcs/CTN |


Product size(unit:mm)

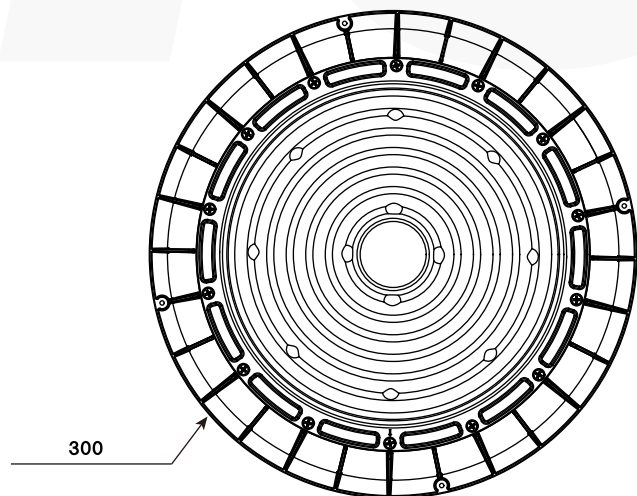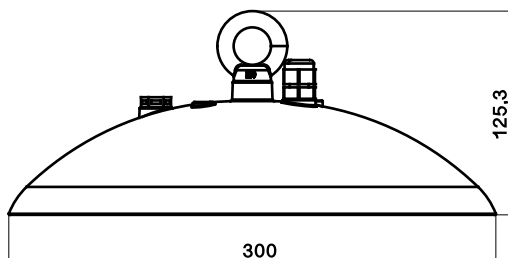


Spectrum

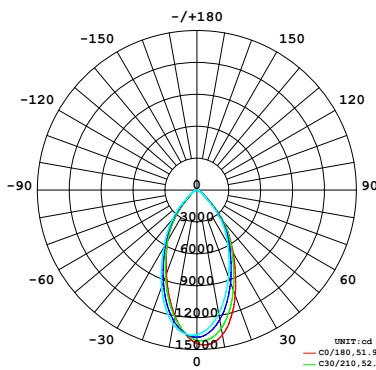

60deg

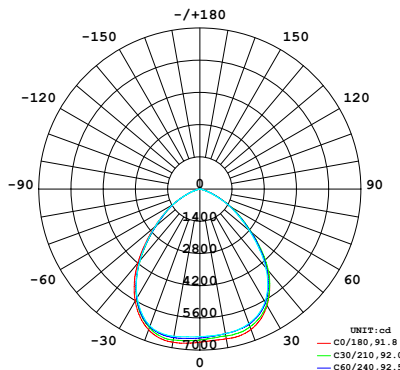


90deg

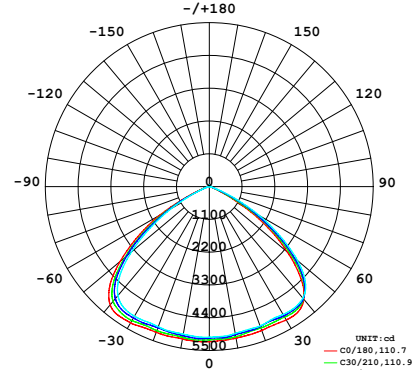

120deg

Structure

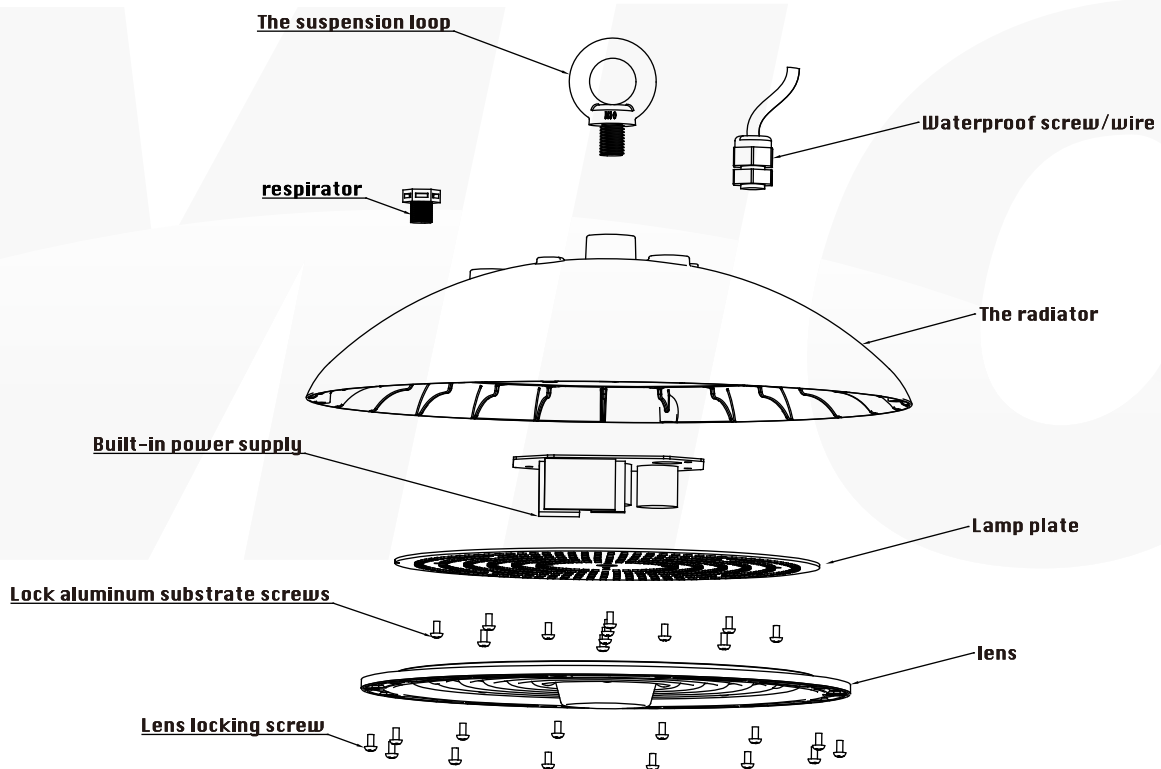

Product Introduction

1. Die-casting technology, ADC12 AL with 92% purification
2. Top brands chips, high brightness and CRI for cost saving
3. 3.60/90/110° beam angle options, Anti-UV lens, transmittance up to 94%
4. Top brands waterproof driver IP67, Input voltage AC100-277V