



1000W LED FLOOD LIGHT

LIGHT THE WORLD



ITEM No.: MFL-R1000-4









Electrical Specifications

• Led Power	1000w
• IP Grade	IP66
• IK	IK08
• Input Voltage	100-77Vac & 180-528Vac
• Operating Temperature	-35°C to +50°C
• Driver Brand	Moso (DMX&DALI optional)
• Power Factor (PF)	>0.95
• Driver Efficiency	>92%
• Certification	CE,ROHS,TUV,ETL

Photometric & Packing Specifications

• Led Lamp	SMD 5050	PHILIPS	• Guarantee	5 years
• Led Quantity	400pcs LEDs		• CCT	2700k~6500k
• Lumen Output	>160,000LM		• CRI	>80
• Light Efficient	160lm/w		• NW/GW	25kg/27.5kg
• Beam angle	15°/20°/40°/60°		• Product size	L536*W513*H419mm
• Life span	>50,000 hours		• Carton size	802*590*375mm, 1pcs/CTN

Product size(unit:mm)

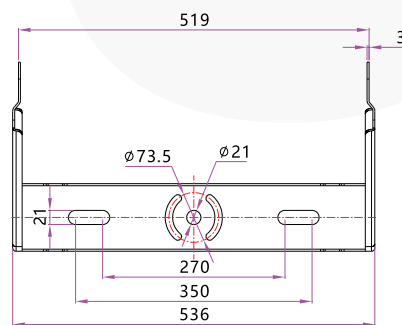

The technical drawings illustrate the 1000 Series Ball Bearing Hinge in various configurations. The top-left view shows the hinge from above, highlighting the circular ball bearing plate with four mounting holes. The top-right view shows the hinge from the side, displaying the internal ball bearing mechanism and the adjustable arm. The bottom-left view shows the hinge mounted on a surface, with the arm extended. The bottom-right view shows the hinge mounted on a surface, with the arm retracted. The bottom-center view shows the hinge mounted on a surface, with the arm extended and the ball bearing plate visible.