



1500W LED FLOOD LIGHT

LIGHT THE WORLD



ITEM No.: MFL-R1500-4







Electrical Specifications

• Led Power	1500w
• IP Grade	IP66
• IK	IK08
• Input Voltage	100-277Vac & 180-528Vac
• Operating Temperature	-35°C to +50°C
• Driver Brand	Moso (DMX&DALI optional)
• Power Factor (PF)	>0.95
• Driver Efficiency	>92%
• Certification	CE,ROHS,TUV,ETL

Photometric & Packing Specifications

• Led Lamp	SMD 5050	PHILIPS	• Guarantee	5 years
• Led Quantity	540pcs LEDs		• CCT	2700k~6500k
• Lumen Output	>240,000LM		• CRI	>80
• Light Efficient	160lm/w		• NW/GW	27kg/29kg
• Beam angle	15°/20°/40°/60°		• Product size	L595*W571*H443mm
• Life span	>50,000 hours		• Carton size	868*649*375mm, 1pcs/CTN

Product size(unit:mm)

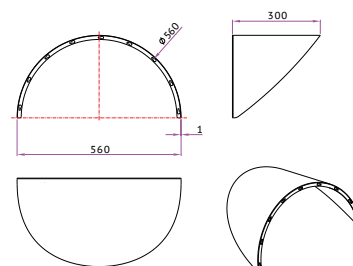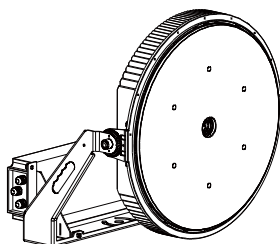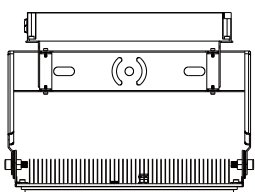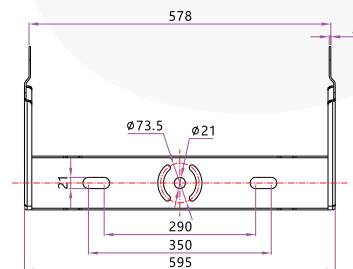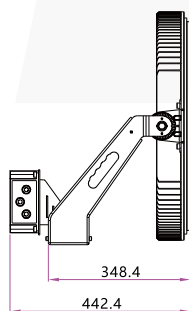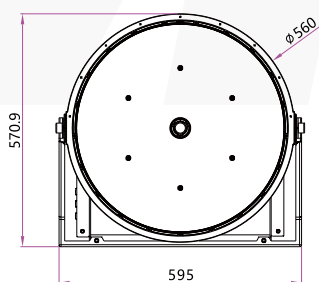

The technical drawings illustrate the 1000 Series Ball Bearing Hinge in various configurations:

- Top View:** Shows the circular face of the hinge with four mounting holes and a central pivot point.
- Side View:** Shows the hinge's profile, including the ball bearing mechanism and the mounting plate.
- Bottom View:** Shows the hinge from the opposite side, highlighting the mounting plate and the ball bearing.
- Installation Options:** Three diagrams show the hinge being installed on a surface, demonstrating its flexibility in different orientations.