


MIC 120W LED FLOOD LIGHT

LIGHT THE WORLD

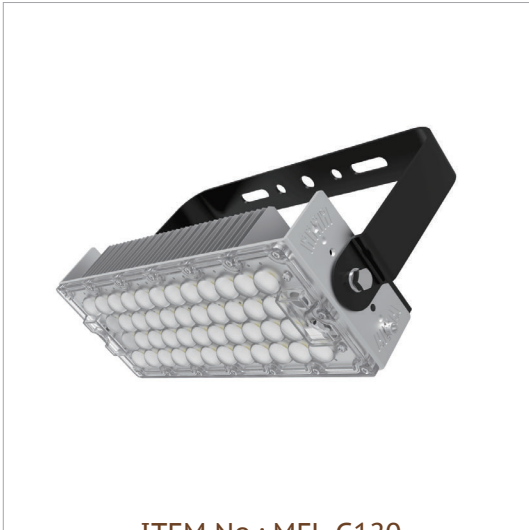

ITEM No.: MFL-G120

Electrical Specifications


• Led Power	120w
• IP Grade	IP66
• Input Voltage	AC85-305V
• Operating Temperature	-40°C to +55°C
• Driver Brand	Meanwell & Sosen
• Power Factor (PF)	>0.95
• Driver Efficiency	>92%
• Certification	CE,ROHS,TUV,FCC,ETL/DLC



Photometric & Packing Specifications




• Led Lamp	SMD 5050	PHILIPS	• Guarantee	6(Meanwell) & 5(Sosen) years
• Led Quantity	46pcs LEDs		• CCT	2700k~6500k
• Lumen Output	>19200LM		• CRI	>80
• Light Efficient	160lm/w		• NW/GW	2.8kg/3.3kg
• Life span	>50000 hours		• Product size	W310*L116*H132mm
• Beam angle	20/40/60/90°(Symmetrical) 100°140°(Asymmetrical)		• Carton size	370*270*180mm, 1pcs/CTN

Product size

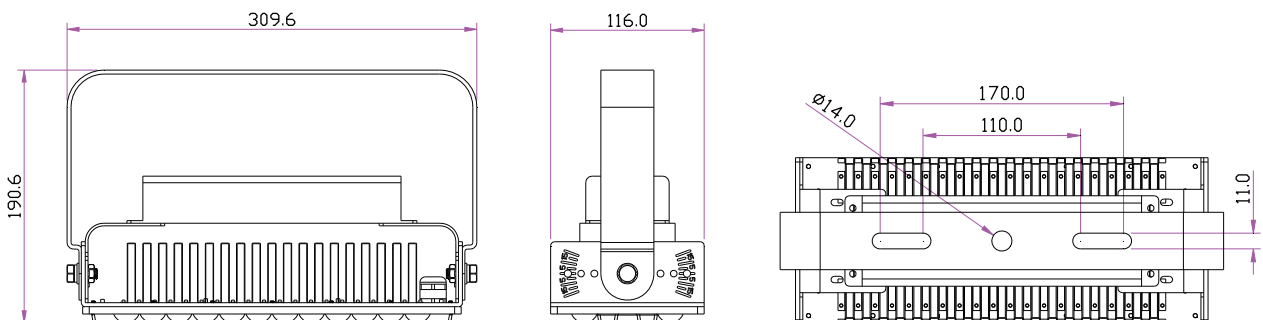


Lens optional


Symmetrical PC lens: 20°/40°/60°/90°, Asymmetrical PC lens: 100°×140°

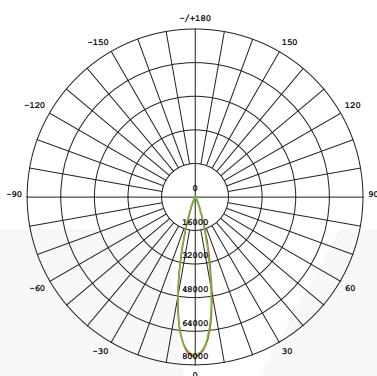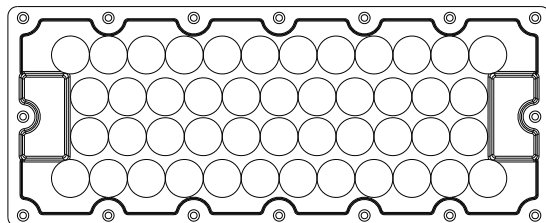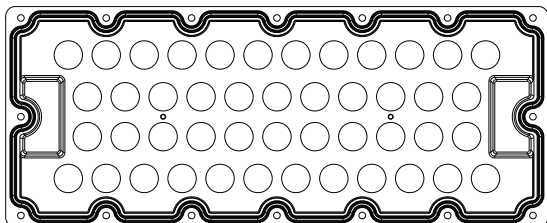


20°

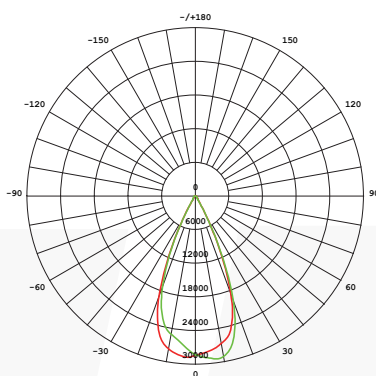


40°

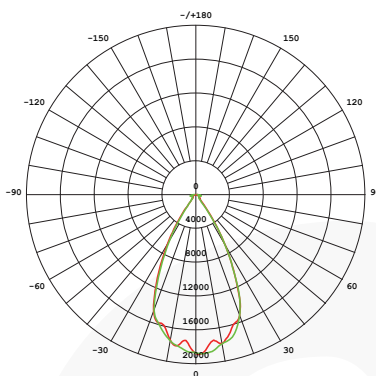

60°

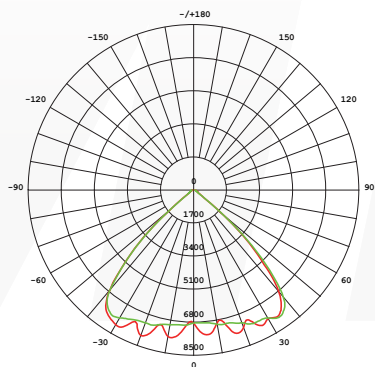

90°

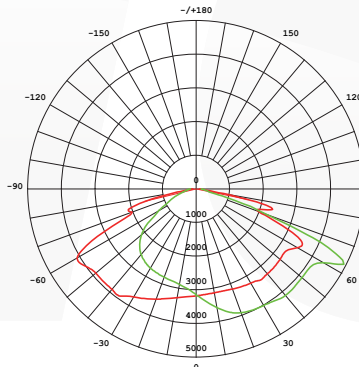

100°×140°

Warning

1. Please hire qualified person or professional installation company to install the light.
2. Please check the local voltage range is correspond with the working voltage of the light before installation.
3. Examine product carefully after open the carton. If it's damaged, please contact us.
4. Make sure the power supply has been cut off before maintenance or installation the lamp. After confirm the power cord is properly installed, the power can be turn on.
5. Make sure there is a good ventilation environment around the lamp. Keep the light out of fire, electrical shock or vibration.